FedECS-LT, from the problem to the defence

1 The problem

Federated learning. In federated learning, data stay on the devices or institutions that own them, the *clients*. A *server* coordinates training. In each *round* the server sends a model to the clients, each client trains it for a while on its own data, and the server combines the returned models into a new one. The standard way of combining is FedAvg: the server averages the clients' parameters, coordinate by coordinate. No raw data leave a client; only parameters or other summaries do.

Different models. FedAvg needs every client to train the same network, because only then do the j-th parameters of two clients mean the same thing. In practice clients run different hardware, so they may run different networks: a phone runs a small convolutional network, a hospital server a larger one. This is *model-heterogeneous* federated learning. Parameters of different architectures cannot be averaged, so the clients must share knowledge in another form. The paper studies one such form, a shared generator of synthetic features (Chapter 2).

Skewed and long-tailed labels. The second difficulty is in the labels. Two properties combine.

- *Label skew*: clients hold different classes in different proportions. A client may have hundreds of images of one class and none of another.
- *A global long tail*: over the whole federation, a few classes are frequent and many are rare.

The paper builds both in a controlled way. For a dataset with C classes the class sizes follow

$$n_c \propto \rho^{-c/(C-1)}, \qquad c = 0, \dots, C-1,$$

so class 0 is the largest, class $C-1$ the smallest, and the *imbalance ratio* $\rho = n_0/n_{C-1}$ fixes how steep the tail is. The paper uses $\rho = 100$. Each class is then divided among the K clients by a Dirichlet draw: for class c a vector of shares $(p_{1c}, \dots, p_{Kc})$ is drawn from Dirichlet$(\alpha, \dots, \alpha)$, and client k receives a fraction p_{kc} of the class. A small concentration α gives very uneven shares; the paper uses $\alpha = 0.5$.

The running example. The text returns to one concrete case throughout: CIFAR-10-LT with $\rho = 100$, $K = 10$ clients and $\alpha = 0.5$, split with seed 3. The run logs (the field `client_counts` of the CIFAR-10-LT runs in `fedecs_lt/results/NB10_main_cifar10_*/runs.jsonl`) give its class sizes,

$$(n_0, \dots, n_9) = (4800,\ 4800,\ 3620,\ 2170,\ 1301,\ 779,\ 467,\ 280,\ 168,\ 100),$$

18,485 training images in all. The profile asks for more than 4,800 images of classes 0 and 1, but CIFAR-10 has only 5,000 per class and 200 are held out for validation, so these two classes are capped. The realised ratio is therefore $4800/100 = 48$, not 100. The paper still names the setting by its target ratio $\rho = 100$ and gives the realised ratio in its dataset table (Table 1).

Table 1: The datasets as used in the paper (the paper's dataset table): number of classes, training images held by the clients, test images, and the realised ratio between the largest and the smallest class. The first two are the long-tailed benchmarks built with $\rho = 100$; the others keep their own class sizes. Look at the last column: the realised ratios differ from the target 100, and three natural datasets are only mildly imbalanced.

Dataset	Classes	Training images	Test images	Largest / smallest class
MNIST-LT	10	5,996	10,000	101
Fashion-MNIST-LT	10	5,996	10,000	101
SVHN-LT	10	7,321	26,032	102
CIFAR-10-LT	10	18,485	10,000	48
CIFAR-100-LT	100	10,926	10,000	96
DermaMNIST	7	6,231	2,005	75
OrganAMNIST	11	19,994	17,778	5
BloodMNIST	8	10,359	3,421	3
PathMNIST	9	19,997	7,180	2
EMNIST (ByClass)	62	19,970	116,323	20
FER-2013	7	19,997	3,589	17

The rare class 9 shows what the split does to a rare class. Of its 100 images, client 7 holds 63. The other holders have between 1 and 14 each, and clients 2 and 5 have none. (Clients are numbered 1 to 10 here; in the run logs they are 0 to 9.) A class that is rare in the federation is held by few clients, and most of them see it only a few times.

How the loss is measured. Plain accuracy hides what happens to rare classes. Take a model that recognises classes 0–4 with recall 90% and classes 5–9 with recall 10%. On a test set with the training proportions above, its accuracy is

$$\frac{0.9 \cdot (4800 + 4800 + 3620 + 2170 + 1301) + 0.1 \cdot (779 + 467 + 280 + 168 + 100)}{18485}$$
$$= \frac{15021.9 + 179.4}{18485} \approx 82\%,$$

because the first five classes hold 90% of the images. Yet the model fails on half of the classes. *Balanced accuracy* is the mean of the per-class recalls, here $(5 \cdot 0.9 + 5 \cdot 0.1)/10 = 50\%$: every class counts equally, whatever its size. It is the paper's primary metric. The test sets of CIFAR-10 and CIFAR-100 are balanced (1,000 and 100 images per class), so there the two measures coincide; on the naturally imbalanced datasets they do not.


With ten client models, one per architecture, the paper reports the mean over the ten models of each model's balanced accuracy,

$$\text{balanced accuracy} = \frac{1}{10} \sum_{g=1}^{10} \frac{1}{C} \sum_{c=0}^{C-1} \text{rec}_{gc},$$

where rec_{gc} is the recall of class c (the share of its test images predicted as c) by the model of architecture g.

Two protocols. The paper tests its method in two settings.

- *Different client models*, the setting the method is built for: ten clients, each with its own network architecture, on the long-tailed benchmarks CIFAR-10-LT and CIFAR-100-LT and on six datasets whose classes are naturally imbalanced (Table 1).



Every client sends parameters to the server in each round of every stage. Stage I averages the extractor over all clients (and each head over the clients of its architecture); Stage II averages the generator over all clients; Stage III averages each head over the clients of its architecture, which does nothing when every architecture has one client.

Figure 1: GeFL-F's three stages. The extractor and the generator are shared by all clients; the heads are not. Look at what crosses each arrow: after Stage I only features, after Stage II only the generator.

- *One shared model*, the standard protocol of federated long-tail research: twenty clients train one ResNet-8 together. Here the specialised long-tail methods of the literature apply, so this setting shows how the method compares with them outside its own design.

How can clients that run different models share knowledge at all?

2 The base system: GeFL-F

Model-heterogeneous methods differ in what the clients exchange: predictions on shared inputs (FedDF, FedMD), class means of internal representations (FedProto, FedTGP), a shared part of the network (LG-FedAvg, FedGH, FedMRL), or a generator of synthetic data (FedGen, GeFL). One of them returns throughout this text: in FedDF the server, after every round, distils each architecture toward the mean prediction of all architectures on shared inputs. The paper builds on GeFL-F, the feature-level variant of GeFL. It splits every client's network into two parts, a small *extractor* that all clients share and a *head* that is specific to the client's architecture, and lets the clients share a generator of extractor outputs. Training runs in three stages (Fig. 1).

Stage I: the shared extractor. All clients train a small convolutional extractor ϕ together with their heads by FedAvg, for $T_{\mathrm{I}} = 50$ rounds on CIFAR. The extractor is the same network for everyone, so it can be averaged. On CIFAR it is two 3×3 convolutions with three and ten output channels, each followed by batch normalisation and ReLU, and a 2×2 max pooling. A 32×32 image becomes a $10 \times 16 \times 16$ array, the *feature* $h = \phi(x)$, with $d = 2560$ numbers. After Stage I the extractor is frozen, and every client computes the features of its images once, without augmentation. From then on, every client works on features, not images. Freezing is what makes the later stages possible: the generator of Stage II learns the distribution of the extractor's outputs, so that target must not move while the generator is trained and used, and the heads of all architectures must read the same kind of input.

The heads. Client k trains a head of its own architecture, one of ten convolutional networks CNN-1 to CNN-10 with one to four convolutional blocks of different widths (Table 2). Each head has two parts. Its *body*, the convolutional blocks, maps a feature h to an *embedding* e of dimension d_e; its *last layer* is linear and maps e to the C logits $f = We + b$. In the main setting there are ten clients and client k trains architecture k, so each architecture has exactly one client.

Table 2: The ten head architectures on CIFAR (from `settings.HEADER_WIDTHS` and `models.PaperHeader` in `fedecs_lt/src`): output channels of each 3×3 convolutional block (each followed by ReLU and 2×2 max pooling; on the medical datasets also by batch normalisation), embedding dimension d_e and number of parameters with $C = 10$. Look at d_e: it falls as the heads get deeper, so the deepest heads have the smallest embeddings.

Head	1	2	3	4	5	6	7	8	9	10
Blocks	16	16,32	20,40	10,20	16,32,64	20,40,80	10,20,40	16,...,128	20,...,100	10,...,80
d_e	1024	512	640	320	256	320	160	128	100	80
Parameters	11.7k	11.2k	15.5k	5.9k	27.2k	41.1k	11.6k	99.7k	111.0k	39.7k

Stage II: the shared generator. The clients train a conditional variational autoencoder $G(h \mid y)$ on their features, again by FedAvg, for $T_{\mathrm{II}} = 200$ rounds, with the Adam optimiser and coupled weight decay (an L2 penalty $\lambda\|\theta\|^2/2$ on the parameters θ, added to the loss). The generator takes a class label y and random noise z and outputs a feature $\tilde{h}$ that should look like a real feature of class y. The label enters through a linear projection of the one-hot vector $\mathbf{1}_y$; the weights that multiply class c form a vector r_c, the *class row*. (The paper also writes G for the number of architectures; this text writes "ten architectures" instead, so G always means the generator.) The class rows are the only parameters of the generator that belong to one class: everything the generator knows that distinguishes class c from the others must pass through r_c.

Stage III: training the heads. For $T_{\mathrm{III}} = 100$ rounds, every client trains its head in two phases. In the *synthetic phase* it draws labels uniformly over all C classes, generates features for them, and trains for T_s epochs on these pairs with cross-entropy ($T_s = 1$ in GeFL-F). In the *real phase* it trains for $T_r = 5$ epochs on its own features. The server then averages the heads of each architecture. With one client per architecture this averaging does nothing, so in the main setting the only knowledge a head receives from other clients comes through the generator. This fact returns in Chapters 7 and 9.

Why a generator helps. Client 2 of the running example holds no image of class 9. Its real phase can only teach its head to separate the classes it holds. The synthetic phase can show the head features of class 9, made by a generator that was trained partly on client 7's 63 images of that class. If the generated class-9 features look like real ones, client 2's head learns class 9 without ever seeing a class-9 image. Whether they do look like real ones is the central question of Chapter 4.

What goes wrong. GeFL-F was designed and evaluated on balanced clients. On CIFAR-10-LT (mean over seeds 3–5, of which the running example is the first) it reaches 33.7 ± 1.2 balanced accuracy, about the level of Local, in which every client trains alone (32.1 ± 0.7). On the tail classes, the 40% least frequent (classes 6–9), its recall is 13.9 ± 1.2. On CIFAR-100-LT it reaches 7.7 ± 0.4, against 7.9 ± 0.8 for Local. On these benchmarks GeFL-F ends close to training alone.

Before looking for where GeFL-F loses the rare classes, one question narrows the search: what can bias a class-level quantity in a federation at all?

3 What federation can and cannot bias

One fact answers most of this question, and the whole method rests on it.

A client split is a pure label shift. The Dirichlet split of Chapter 1 decides *how many* images of each class a client gets, but within a class it picks the images uniformly at random. So the class-9 images of client 7 are a random subset of all class-9 images, and the same is true of every client and class. In symbols, the distribution of an image given its class is the same on every client as on the pooled data,

$$P_k(x \mid y) = P(x \mid y) \quad \text{for every client } k \text{ that holds class } y.$$

Only the class proportions $P_k(y)$ differ. The extractor is shared, so the same holds for the features $h = \phi(x)$.

The consequence: any quantity that describes one class, such as the mean feature of class 9, its spread, or the best weight vector for class 9 in a last layer, has the *same target* on every client that holds the class and on the pooled data. Federation cannot move that target. It can only make the estimate noisier, because each client sees fewer samples, or slower to learn. So when a class-level quantity ends up *biased* in a federated method, something in the method's estimation procedure must have caused it.

Sums are exact. Many class-level quantities can be computed from sums. The mean feature of class c is

$$\mu_c = \frac{\sum_k S_{kc}^{(1)}}{\sum_k n_{kc}}, \qquad S_{kc}^{(1)} = \sum_{i \in D_{kc}} h_i,$$

where D_{kc} is client k's set of class-c images and n_{kc} its size. If every client sends its count n_{kc} and its sum $S_{kc}^{(1)}$, the server obtains μ_c exactly, whatever the split. For class 9 of the running example, client 7 sends 63 and the sum of its 63 features, client 9 sends 14 and the sum of its 14, and so on; the server divides the total sum by the total count, 100, and gets the same mean it would get from the 100 images in one place. In numbers, for one coordinate of the feature and for illustration: if client 7's 63 values sum to 31.5 and the other holders' 37 values sum to 18.5, the server computes $(31.5 + 18.5)/(63 + 37) = 0.5$, which is what the 100 values in one place give. The paper states this as a lemma.

Lemma (partition invariance)**.** *An estimator that is a function of a sum $S = \sum_k \sum_{i \in D_k} \psi(x_i, y_i)$, with the map ψ fixed in advance, takes the same value for every partition of the pooled data, and equals the centralised estimator.*

The proof is that addition does not depend on the order or grouping of its terms. The lemma is simple, and the paper says that it is known for closed-form federated classifiers (Fed3R, AFL, FedCOF). Its use here is that it tells which quantities a federated method can compute *without any bias from the split*: those that are functions of per-client sums. The class spread is one. (The lemma does not remove the bias that a small sample causes in any estimator, centralised or not; that bias is the fourth route at the end of this chapter.) With $S_{kc}^{(2)} = \sum_{i \in D_{kc}} \|h_i\|^2$,

$$V_c = \frac{\sum_k S_{kc}^{(2)}}{n_c} - \|\mu_c\|^2 = \mathbb{E}\big[\|h - \mu_c\|^2 \,\big|\, y = c\big],$$

the mean squared distance of a class-c feature from the class mean, is also exact.

Secure aggregation. Sending per-client sums to the server would reveal each client's class counts and feature sums. *Secure aggregation* is a cryptographic protocol that lets the server learn the sum over clients of vectors and nothing else about any single vector. The basic idea: every pair of clients agrees on a random mask; one adds it to its vector, the other subtracts it; each masked vector looks random to the server, but in the sum the masks cancel. With three clients holding the numbers 5, 2 and 4: clients 1 and 2 agree on the mask 17, clients 1 and 3 on 9, clients 2 and 3 on 30. Client 1 sends $5 + 17 + 9 = 31$, client 2 sends $2 - 17 + 30 = 15$, client 3 sends $4 - 9 - 30 = -35$. The server sees 31, 15 and -35, which say nothing about 5, 2 and 4, and their sum is $11 = 5 + 2 + 4$. With only two clients the protocol would protect nothing: each client could subtract its own number from the published sum and obtain the other's. The paper uses Flower's SecAgg+, a variant that tolerates clients dropping out.

The protocol works on integers, so each vector is divided by a public bound and quantised to 30 bits with unbiased stochastic rounding. The quantiser covers the range from -8 to $+8$ bounds, 16 bounds in all, with 2^{30} levels, so its step, the largest rounding error, is $16/2^{30} \approx 1.5 \times 10^{-8}$ of the bound per client and coordinate. Values beyond eight times the bound would be clipped, and with fewer than three participants the protocol cannot run and the sum is computed in clear. The paper calls the statistics *exact* in this sense: exact up to this quantisation. The bounds come from a small validation set that the server holds (200 images per class on CIFAR-10, held out from the training data), never from the clients' data.

What secure aggregation does not hide is the sum itself. If a class is held by a single client, the federation-level sum of that class is that client's sum. Chapter 5 returns to what the released sums reveal.

How bias still enters. If the targets cannot be biased by the split, a federated method can still bias its estimate of them in four ways, which the paper examines.

1. *The optimiser.* An optimiser can treat clients that lack a class differently from clients that hold it, and averaging can then pull a class parameter away from its target.
2. *Parameters tied to one client's prior.* A last-layer bias trained on one client's data learns that client's class proportions, which are not the federation's.
3. *What the synthetic data teach.* Training on generated features teaches whatever those features carry. If they do not carry their label, the training teaches something else.
4. *Sample size.* Nonlinear estimates, such as a spread or an inverse covariance matrix, are biased in small samples. Class 9 has 100 images and features of dimension 2560: its covariance matrix cannot even be inverted.

The paper does not claim that the list is complete. For example, drift of the shared extractor in Stage I, where the extractor is trained by FedAvg on skewed data, is not covered.

Which of these routes actually hurt GeFL-F?

4 Where GeFL-F loses the rare classes

The paper finds a candidate loss on each of the first three routes of Chapter 3: the optimiser in Stage II, the last layer in Stage III, and the synthetic data in Stage III. The fourth route, sample size, is not a loss of GeFL-F but a constraint on any repair: it decides how the exact

readout of Chapter 5 has to estimate its covariance. The evidence for the three losses differs in strength, and the paper says so.

4.1 The generator: coupled weight decay under Adam

The situation. In one round of Stage II, every client starts from the global generator, takes some local Adam steps on its own features, and returns its copy; the server averages the copies. Consider the class row r_9 of the running example on client 2, which holds no image of class 9. Client 2 never generates a class-9 feature during training, so its data loss does not depend on r_9 at all. The only force on r_9 is the weight decay. With coupled decay the penalty $\frac{\lambda}{2}\|\theta\|^2$ is part of the loss, so the gradient of client 2's loss with respect to r_9 is exactly

$$g = \lambda r_9.$$

With plain SGD this would move r_9 by $\eta\lambda r_9$ per step, a tiny amount: with the generator's learning rate $\eta = 10^{-3}$ and decay $\lambda = 10^{-3}$, one part in a million of the row per step. Adam behaves very differently.

Why Adam makes the decay large. Adam divides each gradient coordinate by a running estimate of its own magnitude. With the running means m of the gradient and v of its square (decay rates $\beta_1 = 0.9$, $\beta_2 = 0.999$; these βs belong to Adam only) and their bias-corrected versions $\hat{m} = m/(1-\beta_1^t)$ and $\hat{v} = v/(1-\beta_2^t)$ after t steps, a step is

$$\theta \leftarrow \theta - \eta\,\frac{\hat{m}}{\sqrt{\hat{v}} + \epsilon}, \qquad \epsilon = 10^{-8}.$$

Take, for illustration, one coordinate of r_9 equal to 0.5, so $g = \lambda \cdot 0.5 = 5 \times 10^{-4}$, and start from $m = v = 0$.

- Step 1: $m = 0.1\,g$ and $v = 0.001\,g^2$. The corrections divide by $1 - 0.9 = 0.1$ and $1 - 0.999 = 0.001$, so $\hat{m} = g$, $\hat{v} = g^2$, and the step is $\eta\,g/(|g| + \epsilon) \approx \eta = 10^{-3}$ toward zero.
- Step 2: the coordinate is now 0.499, so the gradient is still g to three digits. Then $m = 0.9 \cdot 0.1g + 0.1g = 0.19\,g$ and $v = 0.999 \cdot 0.001g^2 + 0.001g^2 = 0.001999\,g^2$. The corrections divide by $1 - 0.9^2 = 0.19$ and $1 - 0.999^2 = 0.001999$, so again $\hat{m} = g$, $\hat{v} = g^2$, and the step is again $\approx \eta$.

As long as the gradient keeps its sign and size, every step is one learning rate. Now repeat with a decay 100 times smaller, $\lambda = 10^{-5}$: then $g = 5 \times 10^{-6}$, still much larger than ϵ, and every step is still $\approx 10^{-3}$. The reason is that multiplying every gradient by a number $a > 0$ multiplies $\hat{m}$ by a and $\sqrt{\hat{v}}$ by a, so their ratio does not change: Adam's step depends on the sign and consistency of the gradient, not on its size. A client that lacks class 9 therefore moves every coordinate of r_9 toward zero by about one learning rate per step, whatever the decay, 2,000 times faster than SGD would in this example.

Lemma (coupled decay under Adam)**.** *On a client without class c, the gradient of the loss with coupled L2 regularisation λ with respect to r_c is exactly λr_c. Since Adam is invariant to a positive rescaling of the gradient sequence up to its ϵ, each step of such a client moves every coordinate of r_c toward zero by about the learning rate η, independently of λ, as long as $\lambda|r_{c,j}| \gg \epsilon$. With $\lambda = 0$ this shrinkage vanishes; with decoupled weight decay (AdamW) it becomes a factor $1 - \eta\lambda$ per step, which is negligible here.*

The proof is the two observations above. A client keeps its Adam state between rounds while its parameters are reset to the global ones, so a single step can be somewhat larger than η.

Why pooled training and the holders are different. On pooled data, every batch that contains class 9 gives r_9 a *data* gradient, much larger than λr_9. Adam's v for those coordinates is then dominated by the data gradients, and a step on which only the decay acts is divided by that large $\sqrt{\hat{v}}$, so it is small. This holds as long as class-9 batches come within the memory of v, about $1/(1-\beta_2) = 1000$ steps. The same holds on a client that holds class 9. Stage II trains the generator for 5 local epochs per round in batches of 64 (`local_train.local_gen` in `fedecs_lt/src`). Client 1 of the running example holds 4 class-9 images among 913, so between 1 and 4 of its 15 batches per epoch contain the class: a class-9 batch comes at least once every 15 steps, far within Adam's memory, and its decay-only steps stay small. A holder therefore neither shrinks the row much nor lengthens it: its data gradient fits the row to its few images, which need not make the row longer. The non-holders, clients 2 and 5, shrink it by a full learning rate on every step.

Averaging turns this into contraction. After the round, the server averages the returned rows. Let $\Delta_k = \|r_{k,c}\| - \|r_c\|$ be the change of the length of class c's row on client k during the round. Let $\bar{g}_c^+$ (the paper's $\bar{G}_c$) be the mean of Δ_k over the m_c clients that hold the class (the *holders*), $\bar{g}_c^-$ the mean of $-\Delta_k$ over the others (a positive number when they shrink the row), and $p_c = m_c/K$ the share of holders.

Lemma (contraction under flat averaging)**.** *Under $r_c^+ = \frac{1}{K}\sum_k r_{k,c}$, $\|r_c^+\| \le \|r_c\| + p_c\bar{g}_c^+ - (1-p_c)\bar{g}_c^-$, with equality if and only if all $r_{k,c}$ are non-negative multiples of one another. The row contracts whenever $p_c < \bar{g}_c^-/(\bar{g}_c^+ + \bar{g}_c^-)$.*

The proof is the triangle inequality: the length of an average is at most the average of the lengths, $\frac{1}{K}\sum_k \|r_{k,c}\| = \|r_c\| + \frac{1}{K}\sum_k \Delta_k = \|r_c\| + p_c\bar{g}_c^+ - (1-p_c)\bar{g}_c^-$. The bound is negative when $p_c\bar{g}_c^+ < (1-p_c)\bar{g}_c^-$, which rearranges to $p_c < \bar{g}_c^-/(\bar{g}_c^+ + \bar{g}_c^-)$. The inequality is often strict, because clients that fit the row to their own few images move it in different directions, and averaging vectors that point in different directions shortens them further.

The two classes of the running example show the difference. Class 0 is held by all ten clients, so $p_0 = 1$: there are no non-holders, the decay term is absent, and the row can shrink only through the triangle inequality. Class 9 is held by eight clients, $p_9 = 0.8$. Take, for illustration, $\bar{g}_9^+ = 0.02$ and $\bar{g}_9^- = 0.05$: the threshold is $0.05/0.07 = 0.71$, below 0.8, and the bound allows a gain of $0.8 \cdot 0.02 - 0.2 \cdot 0.05 = 0.006$ per round. If the holders' mean change is zero, which the previous paragraph makes plausible, the threshold is 1, above 0.8, and the row shrinks by at least $0.2 \cdot 0.05 = 0.01$ every round, over 200 rounds. Figure 2 draws this picture with made-up numbers.

The paper also gives a predictor of the direction, counting Adam steps:

$$\kappa_c = \frac{\sum_{k \in H_c} q_k u_{kc}}{\sum_{k \notin H_c} q_k},$$

where H_c is the set of holders, q_k the number of local steps of client k, and u_{kc} the probability that a batch of client k contains class c. The numerator counts the steps on which a holder actually sees the class, the denominator the steps on which a non-holder decays it; a holder's other steps are neglected, which the previous paragraph justifies. When $\kappa_c < 1$ the row

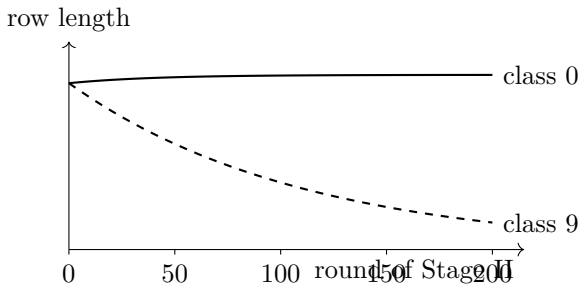


Figure 2: Illustration only (made-up curves, not data): the length of a class row over the rounds of Stage II under coupled decay and flat averaging. Look at the difference in shape: class 0, held by every client, keeps its length; class 9, which two clients lack and the holders rarely see, shrinks a little every round.

drifts toward zero. The paper is explicit that this is a heuristic, not a bound: it ignores the momentum Adam carries between rounds, and it was *not* checked against the measured rows.

The remedies. Two changes remove the effect. Decoupled weight decay (AdamW) applies the decay outside Adam's normalisation, so the shrinkage becomes the negligible factor $1 - \eta\lambda$. Or the rows can be averaged over their holders only, weighted by how much of the class each holds (class-count weighted averaging, CCWA, in Section 5.2): the non-holders' term $\bar{g}_c^-$ then drops out of the lemma.

What was measured. The paper's figure of the class rows (Fig. 3) shows that after Stage II the rows of the rarest classes are several times shorter than those of the most frequent ones. That is the predicted effect, although the lengths do not fall monotonically: class 9's row is longer than those of classes 7 and 8.

A second measurement limits what this shows. After Stage I the server trains a classifier, the *referee*, on the features of its validation images, and asks it to classify 300 generated features of each class. The share it assigns to the intended class is the generator's *fidelity* for that class. If the decay were what makes rare classes fail, the rare classes' fidelity would be low and the frequent classes' high. Instead GeFL-F's generated CIFAR-10-LT features are recognised (besides the tail classes of Chapter 2, the paper reports the *head classes*, the 30% most frequent, and the *medium* classes in between) at 12.9 ± 2.4 on average (chance is 10%), 9.4 ± 0.9 on the head classes and 16.8 ± 0.3 on the tail classes. On CIFAR-100-LT the mean is 1.1 ± 0.1, chance level (Table 3). The referee's accuracy on held-out real features was not logged, so the fidelity values compare generators with each other, not with real data.

How strong the evidence is. The shrinkage is measured and predicted by the lemmas. That it causes the rare classes' low accuracy is not shown: GeFL-F's generator carries little class information for *any* class, and the long head-class rows do not make the head classes recognisable. The direct test is GeFL-F with AdamW and nothing else changed. On CIFAR-10-LT it raises GeFL-F's balanced accuracy by +1.4 points and its tail recall by +2.6 (paired over three seeds, uncorrected $p = 0.043$ and 0.038); its CIFAR-100-LT runs did not finish (Section 7.10). The shrinkage therefore costs some rare-class accuracy, but only a small part of what GeFL-F loses: the gap to FedECS-LT is +18.9 points.

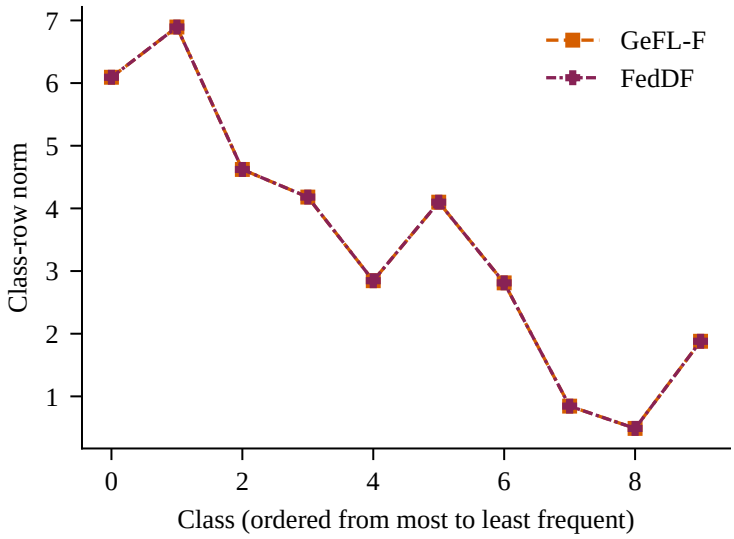


Figure 3: The paper's figure of the class rows: length of each class row of GeFL-F's generator after Stage II, classes from the most frequent (left) to the least frequent (right); CIFAR-10-LT, mean over seeds 3–5. Look at how the length falls toward the rare classes, and at class 9, which breaks the order.

4.2 The last layer: logit corrections cannot add information

The situation. In Stage III, client 2's head is trained on client 2's features only, in the real phase, with the cross-entropy loss $\ell(f, y) = \mathrm{LSE}(f) - f_y$, where $\mathrm{LSE}(f) = \log \sum_c e^{f_c}$. Its last layer therefore learns client 2's class proportions: classes it holds often get large biases, and the classes it lacks (class 9 among them) get pushed down by every step, because cross-entropy lowers the logits of all wrong classes. The natural fix from long-tail learning is to correct the loss with the client's class frequencies $\hat{\pi}_k$ (client k's class counts with one added to each, divided by their total, so that absent classes get a small non-zero frequency). Three methods of the paper do this by adding a constant vector a_k to the logits during training and not at test time:

- *logit adjustment* and *Balanced Softmax*: $a_k = \tau \log \hat{\pi}_k$, with $\tau = 1$;
- *FedLC*: $a_{kc} = -\tau(n_{kc} + 1)^{-1/4}$, which lowers the logits of rare classes during training (`fedecs.client_loss_adj`);
- *FedRS* instead multiplies the logits of the classes the client lacks by $\alpha_{\mathrm{RS}} = 0.5$ during training (not the Dirichlet α of Chapter 1).

Post-hoc logit adjustment is the version without retraining: train plainly, then subtract $\tau \log \hat{\pi}$ from the logits at test time, which raises the classes the training data made rare.

The statement. Write θ for the parameters of the head's body and (W, b) for its last layer.

Lemma (logit corrections are reparametrisations)**.** *Let a head have a free last-layer bias b, trained by SGD without decay on b, and let $a_k \in \mathbb{R}^C$ be a constant of client k, as in logit adjustment ($a_k = \tau \log \hat{\pi}_k$), FedLC or Balanced Softmax. Training with the loss $\ell(f + a_k, y)$ from (θ_0, b_0) produces exactly the trajectory of training with $\ell(f, y)$ from $(\theta_0, b_0 + a_k)$: every parameter except b is the same at every step. FedRS, which scales the logits of absent classes by*

Table 3: The paper's fidelity table: the referee's per-class accuracy on generated features (%), averaged over all classes and over the head, medium and tail classes; mean ± standard deviation over seeds 3–5. FedDF uses GeFL-F's generator; FedECS-LT's rows belong to Chapter 5. Look at GeFL-F's row: every group is near the chance level of 10% (CIFAR-10-LT) and 1% (CIFAR-100-LT).

Dataset	Generator	All	Head	Medium	Tail
MNIST	FedECS-LT (generator)	98.3 ± 0.6	99.4 ± 0.3	98.4 ± 0.6	97.3 ± 1.9
MNIST	FedECS-LT (after moment correction)	94.1 ± 0.8	98.1 ± 0.2	93.7 ± 0.9	91.4 ± 2.5
MNIST	GeFL-F (generator)	37.6 ± 5.1	80.1 ± 10.3	33.9 ± 7.7	8.5 ± 2.5
MNIST	FedDF (generator)	37.7 ± 5.0	80.1 ± 10.1	34.1 ± 7.8	8.6 ± 2.3
Fashion-MNIST	FedECS-LT (generator)	87.2 ± 2.7	89.1 ± 2.7	84.1 ± 5.9	88.0 ± 3.7
Fashion-MNIST	FedECS-LT (after moment correction)	81.8 ± 1.0	83.4 ± 1.3	83.6 ± 2.5	79.3 ± 1.7
Fashion-MNIST	GeFL-F (generator)	56.0 ± 10.0	80.9 ± 5.4	66.2 ± 5.2	29.8 ± 17.4
Fashion-MNIST	FedDF (generator)	56.0 ± 9.9	81.3 ± 5.7	65.6 ± 4.6	29.9 ± 17.6
SVHN	FedECS-LT (generator)	52.2 ± 2.3	73.5 ± 1.6	51.1 ± 3.5	37.2 ± 3.7
SVHN	FedECS-LT (after moment correction)	54.4 ± 2.8	73.1 ± 1.2	54.1 ± 3.0	40.5 ± 5.5
SVHN	GeFL-F (generator)	43.4 ± 3.0	73.7 ± 1.5	43.4 ± 4.6	20.6 ± 3.4
SVHN	FedDF (generator)	43.5 ± 2.8	73.8 ± 1.6	43.6 ± 4.5	20.6 ± 3.1
CIFAR-10	FedECS-LT (generator)	25.9 ± 2.1	11.0 ± 2.2	16.7 ± 13.0	44.1 ± 5.0
CIFAR-10	FedECS-LT (after moment correction)	28.9 ± 4.6	23.5 ± 6.6	19.2 ± 12.4	40.3 ± 2.8
CIFAR-10	GeFL-F (generator)	12.9 ± 2.4	9.4 ± 0.9	11.2 ± 7.6	16.8 ± 0.3
CIFAR-10	FedDF (generator)	12.8 ± 2.2	9.2 ± 1.2	10.3 ± 7.2	17.3 ± 0.7
CIFAR-100	FedECS-LT (generator)	8.8 ± 1.2	5.9 ± 1.8	8.2 ± 0.8	11.5 ± 1.2
CIFAR-100	FedECS-LT (after moment correction)	8.8 ± 0.4	7.2 ± 0.8	9.0 ± 0.8	9.9 ± 0.6
CIFAR-100	GeFL-F (generator)	1.1 ± 0.1	1.1 ± 0.2	1.1 ± 0.2	1.2 ± 0.2
CIFAR-100	FedDF (generator)	1.1 ± 0.1	1.2 ± 0.2	1.0 ± 0.2	1.1 ± 0.2

$\alpha_{\mathrm{RS}} \in (0, 1]$*, is cross-entropy in the rescaled last-layer variables* $\alpha_{\mathrm{RS}} w_c, \alpha_{\mathrm{RS}} b_c$ *of those classes, trained with the smaller learning rate* $\alpha_{\mathrm{RS}}^2 \eta$*.*

The proof: $f + a_k = We + (b + a_k)$, and moving from b to $b + a_k$ is a translation, which does not change gradients; by induction over the steps the two trajectories agree. So training with the corrected loss is plain training that starts from the bias $b_0 + a_k$, and leaving the correction out at test time subtracts a_k: post-hoc logit adjustment of a head trained from a shifted starting bias. For FedRS, write $\tilde{w}_c = \alpha_{\mathrm{RS}} w_c$; the gradient with respect to $\tilde{w}_c$ is $1/\alpha_{\mathrm{RS}}$ times the gradient with respect to w_c, so a step of η on w_c moves $\tilde{w}_c$ by $\alpha_{\mathrm{RS}}^2 \eta$ times that gradient, while the body sees the same logits.

A three-class example. A client holds 70 images of class A, 30 of class B and none of class C. With add-one smoothing its frequencies are $(71, 31, 1)/103$, so $a = \log \hat{\pi} \approx (-0.37, -1.20, -4.63)$. At test time the corrected head adds $+4.63$ to class C's logit relative to plain training, $+3.43$ more than to class B. That raises class C for *every* input by the same amount. It cannot make class C high for images of class C and low for others, because the weight vector w_C never received a gradient that points toward class-C features: the client has none. The correction moves a threshold; it adds no information about the class. The body can still learn a somewhat different representation, because the shifted logits change the gradients that reach it, but nothing tells it what class C looks like. The literature calls the degradation of rare classes' weight vectors under imbalance *minority collapse*; a head trained on one client is its extreme case, because for the classes the client lacks the imbalance ratio is infinite.

The scope of the lemma. It is exact for a head trained only on real data with one fixed offset, which is how the paper runs Balanced Softmax, FedLC and FedRS. It does not cover

FedECS-LT's heads, whose real phase uses logit adjustment while their synthetic phase does not: the offset is applied in one of two alternating phases, so it is no longer a change of starting point. That is why logit adjustment can matter inside FedECS-LT (Section 5.4).

What was measured. First, replacing GeFL-F's trained last layers by the exact readout of Section 5.5, with nothing else changed, raises its balanced accuracy by +16.6 points on CIFAR-10-LT and +7.2 on CIFAR-100-LT. Second, once the last layers of Balanced Softmax, FedLC and FedRS are replaced by the same readout, the three reach 51.2 ± 0.7, 51.2 ± 0.7 and 51.1 ± 0.7 on CIFAR-10-LT, and 17.2 ± 0.3, 17.2 ± 0.3 and 17.2 ± 0.3 on CIFAR-100-LT. The lemma does not predict this equality, since different offsets give the bodies different gradients; it is consistent with it: whatever the offsets do to the bodies, they make no difference once the last layer is replaced.

How strong the evidence is. The lemma is proved, and the readout gain is measured. Together they suggest that a large part of what GeFL-F loses is in its last layers, and that a last layer that knows the absent classes needs information from other clients. The partition-invariance lemma of Chapter 3 says where to get it: a last layer that is a function of sums over all clients equals the one computed on pooled data. That is the paper's *exact readout*, a classifier computed from summed embedding statistics (Section 5.5).

4.3 The synthetic data: label-free features penalise the logit spread

The situation. In the synthetic phase, labels are drawn uniformly over the C classes and the generator makes a feature for each. If the generated feature carries its label, the head learns the class. If it does not, as the fidelity of Table 3 suggests for GeFL-F, the label is effectively independent of the feature, and the training target is the uniform distribution.

Lemma (label-free synthetic data)**.** *If the synthetic label y is uniform on $\{1, \dots, C\}$ and independent of the generated feature, then for every logit vector f,*

$$\mathbb{E}_y\, \ell(f, y) = \mathrm{LSE}(f) - \bar{f} = \log C + \mathrm{KL}(u \,\|\, \mathrm{softmax} f) = \log C + \frac{1}{2C} \sum_c (f_c - \bar{f})^2 + O(\|f - \bar{f}\|^3),$$

where $\bar{f}$ is the mean logit and u the uniform distribution.

The proof: averaging $\ell(f, y) = \mathrm{LSE}(f) - f_y$ over a uniform y replaces f_y by the mean $\bar{f}$; the KL form follows from the definition of KL; and a second-order expansion of LSE around equal logits gives the quadratic term. In words: averaged over the random label, the cross-entropy is smallest when all logits are equal, and it grows with their variance. The paper measures this as the *logit spread*, the mean over images of the standard deviation s of a head's logits across classes. Since $\frac{1}{C}\sum_c (f_c - \bar{f})^2 = s^2$, the quadratic term is exactly $s^2/2$: training on label-free features penalises the square of the measured quantity.

A numerical check with $C = 10$: equal logits give the loss $\log 10 = 2.303$. The logits $(2, 0, \dots, 0)$ give $\mathrm{LSE} = \log(e^2 + 9) = 2.797$ and $\bar{f} = 0.2$, so the loss is 2.597. Their spread is $s = 0.6$, and the quadratic term alone predicts $2.303 + 0.6^2/2 = 2.483$; the rest is the higher-order term. The more confident the head, the larger the penalty, whatever the class.

What survives the alternation. The synthetic phase is followed by the real phase, which pushes the logits apart again for the classes the client holds. The paper analyses the alternation

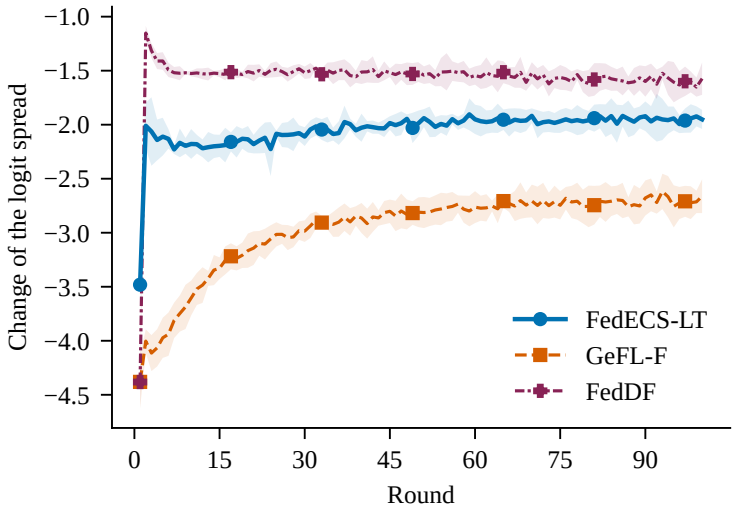


Figure 4: The paper's logit-spread figure: change of the logit spread during the synthetic phase of each Stage-III round (after minus before; negative means the logits were pulled together), CIFAR-10-LT, mean over clients and seeds 3–5. Look at the levels: GeFL-F lowest, FedECS-LT in between, FedDF highest.

in an illustrative model in which both losses are quadratic (an appendix lemma). There one round is an affine map of the parameters, a contraction under a stated condition, so the rounds converge to its fixed point. At that point, along every direction of the parameters that the real loss leaves free, the synthetic loss alone decides. Real heads are nonlinear and trained with cross-entropy, so this suggests, without proving, what happens to them. For a head trained on one client, the directions that concern its absent classes are nearly free in this sense, so there the label-free synthetic phase would decide, and it would flatten exactly the logits the client most needs. Nearly, not exactly, because cross-entropy on the real data keeps pushing the absent classes' logits down. Logit adjustment weakens this push: with the offset $\tau \log \hat{\pi}_k$, an absent class's adjusted logit is already very low, so the real loss is satisfied without lowering its raw logit further.

What was measured. The paper's figure of the logit spread (Fig. 4) shows, in every Stage-III round on CIFAR-10-LT, that the synthetic phase reduces the spread of the heads' logits on the clients' real features, and that it reduces it less for FedECS-LT than for GeFL-F.

How strong the evidence is. The lemma is exact; how much it matters in the pipeline is not settled, for two reasons. FedECS-LT also differs from GeFL-F in its number of synthetic epochs, its soft targets and logit adjustment (all in Section 5.4), so the comparison does not isolate the labels. And FedDF, which trains on GeFL-F's own label-free generator, loses *less* spread than FedECS-LT, so the size of the spread change is not determined by whether the generated features carry their label.

What would a method look like that uses exact statistics exactly where these losses occur?

5 FedECS-LT, component by component

FedECS-LT (Exact Class Statistics for Long-Tailed federated learning) keeps GeFL-F's three stages and its frozen extractor. It obtains the class-specific quantities of the generator and the

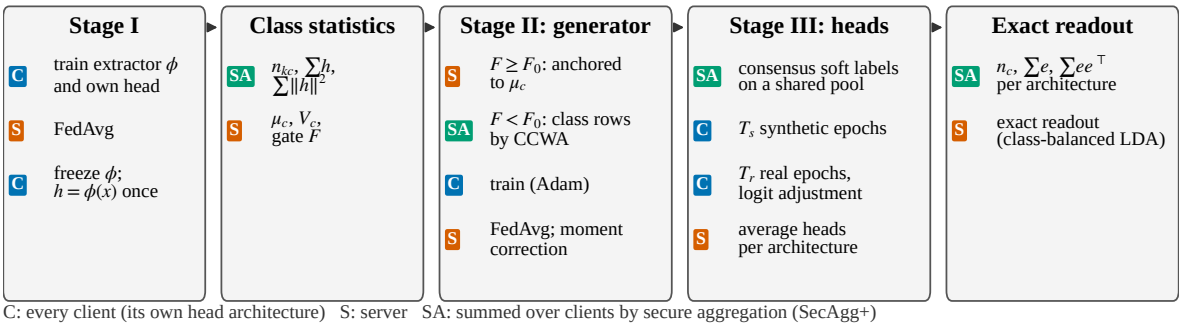


Figure 5: The paper's overview of FedECS-LT. C: computed by each client; S: computed by the server; SA: summed over the clients by secure aggregation. Read it left to right: statistics after Stage I, the generator chosen by the gate (Stage II), the moment correction, the heads (Stage III), and the exact readout last.

last layer from statistics that secure aggregation computes exactly (Chapter 3), the *exact class statistics*, instead of from parameters estimated by FedAvg. It also changes how the heads are trained, and it adds a last step that sets every last layer. Figure 5 is the paper's overview; this chapter takes the components in pipeline order.

5.1 Statistics release

What it answers. Every later component needs the class means and spreads of the features. They are functions of sums, so they can be computed exactly (Chapter 3).

How it works. After Stage I, client k computes for every class c its count n_{kc}, its feature sum $S_{kc}^{(1)}$ and its sum of squared feature norms $S_{kc}^{(2)}$. Secure aggregation returns the totals, and the server forms (`fedecs.moments_from_sums`)

$$\mu_c = S_c^{(1)}/n_c, \qquad V_c = S_c^{(2)}/n_c - \|\mu_c\|^2.$$

μ_c is the mean feature of class c, a vector of $d = 2560$ numbers, and V_c its *spread*, the mean squared distance of a class-c feature from μ_c. In this text "spread" without a qualifier always means V_c, a squared quantity; the *logit spread* of Section 4.3 is a different measurement.

Cost. Each client sends $C(d+2)$ numbers once: for each class, one count, one number for the sum of squared norms, and d for the feature sum. On CIFAR-10 that is $10 \cdot 2562 = 25{,}620$ numbers.

5.2 The generator

The mean-anchored generator. This is the default branch. It generates a class-y feature as

$$\tilde{h} = \mathrm{ReLU}(\mu_y + \mathrm{dec}(z,\ A\mu_y)), \qquad z \sim \mathcal{N}(0, I),$$

where dec is the decoder network and A a projection shared by all classes. The exact mean μ_y is added directly, and the decoder only has to model the deviation from it. The class enters only through the vector μ_y, which the server computed exactly, and through A, which every

class shares. The generator therefore has no class row and no other class-specific parameter: the contraction of Section 4.1 has nothing to shrink. It is trained by FedAvg with Adam, like GeFL-F's.

What an anchor can express. An anchored generator can make two classes only as different as their means allow. The paper's appendix bounds the difference by the *Wasserstein distance* W_1 between the two generated distributions, the least average distance by which the points of one must be moved to turn it into the other:

$$W_1(G_c, G_{c'}) \le (1 + L\|A\|_2)\,\|\mu_c - \mu_{c'}\|,$$

where L is the Lipschitz constant of the decoder in its second input (how much its output can change per unit change of $A\mu$) and $\|A\|_2$ the largest stretch of the projection. The proof idea: generate both classes from the same noise z; then each generated pair differs by at most $\|\mu_c - \mu_{c'}\|$ from the anchor plus $L\|A\|_2$ times that from the decoder, and the ReLU never increases a distance. In words: when two class means are close, the anchored generator cannot make the classes far apart unless $L\|A\|_2$ is large, and nothing in training controls that factor. GeFL-F's class rows have no such limit, because a class row can encode a difference between classes that the mean does not show.

The separation gate. So the server first measures how separated the means are, relative to the spread (`fedecs.separation_F`):

$$F = \frac{\frac{1}{C}\sum_c \|\mu_c - \bar{\mu}\|^2}{\frac{1}{C}\sum_c V_c}, \qquad \bar{\mu} = \frac{1}{C}\sum_c \mu_c.$$

The numerator is the spread of the class means around their centre, the denominator the average spread within a class. (It is a form of the ratio that linear discriminant analysis maximises, which Section 5.5 explains.) If $F \ge F_0 = 0.05$, the server uses the mean-anchored generator; otherwise it falls back to GeFL-F's generator, with class rows averaged by CCWA. The threshold was fixed during the method's development and not swept.

A toy case: two classes on a line with means -1 and $+1$, each with spread $V = 4$ (standard deviation 2). Then $\bar{\mu} = 0$, the numerator is $(1 + 1)/2 = 1$, the denominator 4, and $F = 0.25$. Over pairs of distinct classes, two class means are on average $\sqrt{2FC/(C-1)}$ root-mean-square spreads apart (an appendix identity): here $\sqrt{2 \cdot 0.25 \cdot 2} = 1$, and indeed the means are 2 apart and the spread's root is 2. The threshold $F_0 = 0.05$ with ten classes means $\sqrt{2 \cdot 0.05 \cdot 10/9} \approx 0.33$: class means a third of a spread apart. The running example has $F \approx 0.080$ (seed 3, run log), so two CIFAR-10 class means are on average about 0.42 spreads apart: in the frozen feature space the classes overlap heavily, and yet the anchor branch is chosen. Across all the paper's runs F ranges from 0.009 to 0.575, and the gate chose class rows on CIFAR-10-LT with one shared model, FER-2013 and SVHN (the shared-model protocol is described in Chapter 6).

The fallback: class rows with CCWA. When the gate finds the means too close, the generator keeps GeFL-F's class rows, but the server averages each row only over the clients that hold the class, weighted by how much of it they hold:

$$r_c \leftarrow \frac{\sum_k E(n_{kc})\, r_{k,c}}{\sum_k E(n_{kc})}, \qquad E(n) = \frac{1 - \beta^n}{1 - \beta}, \quad \beta = 0.999.$$

$E(n)$ is the *effective number of samples* (a function of a count, not the expectation $\mathbb{E}$), and this β is CCWA's own constant, unrelated to Adam's β_2 although equal in value. $E(n)$ is zero for a client without the class, so non-holders drop out and the term $\bar{g}_c^-$ of the contraction lemma disappears. It is close to n for small n and saturates at $1/(1-\beta) = 1000$, so one large client cannot dominate a class. For class 9 of the running example, client 7 (63 images) gets weight $E(63) \approx 61.1$, client 1 (4 images) gets $E(4) \approx 4.0$, and clients 2 and 5 get zero. For class 1, client 7's 2,803 images give $E(2803) \approx 940$, not 2,803. Both sums are computed by secure aggregation, so the server never sees a single client's counts.

5.3 Moment correction

What it answers. Even a generator anchored to the right mean can produce features with the wrong spread, too concentrated or too dispersed, and a class-rows generator can drift in mean too. The server knows the exact mean μ_c and spread V_c, so it can correct the generated features to match them.

How it works. After Stage II the server draws 500 features per class from the generator, measures their mean $\tilde{\mu}_c$ and spread $\tilde{V}_c$, and from then on corrects every generated feature of class c by (`fedecs.MomentCalibratedGen`)

$$\tilde{h} \leftarrow \mathrm{ReLU}(\mu_c + s_c(\tilde{h} - \tilde{\mu}_c)), \qquad s_c = \mathrm{clip}\Big(\sqrt{V_c/\tilde{V}_c},\ 0.1,\ 10\Big).$$

The map first moves the generated class to its exact mean, then rescales the deviations so that their spread becomes the exact one. One scale s_c multiplies every coordinate, so the correction matches the total spread, not the shape of the class: a class that is too wide in one direction and too narrow in another keeps that imbalance.

A worked example. Take one coordinate, for illustration, with exact mean 0.5 and exact spread 0.25, and generated features of mean 0.8 and spread 0.0625. Then $s_c = \sqrt{0.25/0.0625} = 2$. A generated value 0.7 becomes $0.5 + 2(0.7 - 0.8) = 0.3$; a generated value 0.5 becomes $0.5 + 2(0.5 - 0.8) = -0.1$, which the ReLU sets to 0. Before the ReLU the corrected values have exactly the target mean and spread. The ReLU raises the negative ones to zero, which pulls them toward the mean, so the corrected spread comes out a little below the target.

Why this map. Without the final ReLU and the clipping, this is the map that reaches the exact mean and spread while moving the generated features as little as possible (an appendix lemma). The proof idea: for a map M with the required mean and spread, the expected squared displacement $\mathbb{E}\|M(X) - X\|^2$ is fixed except for one term, $-2\mathbb{E}\langle M(X) - \mu_c,\ X - \tilde{\mu}_c\rangle$, and the Cauchy–Schwarz inequality says this term is smallest when $M(X) - \mu_c$ is a positive multiple of $X - \tilde{\mu}_c$, which is the map above. The ReLU keeps features non-negative, as real features after a ReLU are, and the clipping prevents extreme rescaling, so in practice the moments match only approximately. Across every class and run of the long-tailed benchmarks, the corrected spread is 0.73 to 1.01 times the exact spread V_c (median 0.87), below one as the example predicts.

Cost. The server sends $(\mu_c, \tilde{\mu}_c, s_c)$ to the clients once; each client holds the generator and corrects its own samples.

What the evidence says. Matching moments is not the same as making features recognisable. The fidelity table (Table 3) shows that on CIFAR-10-LT the correction raises the

referee's accuracy on the head classes from 11.0 ± 2.2 to 23.5 ± 6.6, and changes the tail classes' from 44.1 ± 5.0 to 40.3 ± 2.8 and the mean from 25.9 ± 2.1 to 28.9 ± 4.6. The tail and mean changes are within one standard deviation over the seeds. On CIFAR-100-LT the mean is unchanged (8.8 ± 1.2 and 8.8 ± 0.4). The component ablation (Section 7.10) finds no benefit for accuracy: the full method minus its variant without the correction is -1.1 points with the readout on CIFAR-10-LT.

5.4 The heads

Each Stage-III round, client k, holding n_k real images, first takes $T_s\lfloor n_k/B \rfloor$ SGD steps on batches of B corrected generated features ($B = 128$ on CIFAR), that is, T_s epochs of the size of its real data, and then trains $T_r = 5$ epochs on its real features. Each phase starts a fresh SGD optimiser (learning rate 0.1, no momentum). Three things differ from GeFL-F.

Logit adjustment in the real phase. The real phase uses $\ell(f + \tau \log \hat{\pi}_k, y)$ with $\tau = 1$ and the client's add-one smoothed class frequencies $\hat{\pi}_k$. On a head trained only on real data this would add no information about absent classes (Section 4.2), but here it is applied in the real phase only, between synthetic phases without it, so the reparametrisation lemma does not cover it. The paper gives two reasons for it: without it, cross-entropy keeps pushing the absent classes' logits down during the real phase (Section 4.3), and it can change what the body learns. $\hat{\pi}_k$ is the client's own frequencies, not an exact class statistic. How much logit adjustment contributes is not resolved: its ablation finished one seed per benchmark (Section 7.10).

Consensus soft labels in the synthetic phase. The synthetic phase still draws labels uniformly, but the target is no longer the one-hot label alone. For a generated feature $\tilde{h}$ with label y,

$$t(\tilde{h}) = (1 - \omega)\,\mathbf{1}_y + \omega\,\frac{1}{10}\sum_{g=1}^{10} \mathrm{softmax}(f_g(\tilde{h})), \qquad \omega = 0.5,$$

where $\mathbf{1}_y$ is the one-hot vector of y and f_g the current head of architecture g. The second term is the federation's averaged prediction on that feature, the same kind of target as FedDF's distillation. If a generated "class 9" feature looks to the federation's heads like class 3 with probability 0.4 and like class 9 with 0.05, its target puts $0.5 + 0.5 \cdot 0.05 = 0.525$ on class 9 and 0.2 on class 3. The weight $\omega = 0.5$ was fixed in development.

This answers the third loss of Chapter 4: the target now depends on the feature, so the premise of the label-free lemma, a label independent of the feature, no longer holds, and the synthetic phase need not pull the logits together. The intent is that the target follows what the feature carries instead of forcing a label it may not support, and that every head learns from the ensemble of all ten architectures; the ablation confirms that consensus soft labels improve accuracy: removing them costs +3.9 points with the readout on CIFAR-10-LT and +2.0 on CIFAR-100-LT, the one component effect the ablation resolves (Section 7.10).

How the consensus is computed. The average is computed by one secure sum per round. Every client regenerates the same pool of generated features from a seed the server sends. Writing $\mathrm{arch}(k)$ for the architecture of client k, it returns $w_k\,\mathrm{softmax}(f_{\mathrm{arch}(k)}(\tilde{h}))$ for every feature of the pool, with $w_k = 1/(10 \cdot |\{j : \mathrm{arch}(j) = \mathrm{arch}(k)\}|)$, one over ten times the number of clients of its own architecture. The secure sum of these is the average above. The pool is as large as the largest client's synthetic phase, $T_s\lfloor n_k/B \rfloor B$ (`fedecs.csl_pool_size`): in the

running example, client 7 with 4,538 images gives $10 \cdot 35 \cdot 128 = 44{,}800$ features, so every client returns 448,000 numbers per round. For this every client also receives every architecture's current head each round, which FedAvg within an architecture would not require.

Ten synthetic epochs. $T_s = 10$ instead of GeFL-F's 1. This is more computation, not a statistic, and the paper lists it as one of the method's changes.

5.5 The exact readout

This component gets the most space, because Chapter 7 shows that it carries most of the gain.

What it answers. Section 4.2 showed that a last layer trained on one client knows nothing about the classes the client lacks, and that a last layer computed from sums over all clients equals the one computed on pooled data. The exact readout is such a last layer: after Stage III, every architecture's trained last layer is replaced by a classifier computed from aggregated statistics of the embeddings.

The classifier. Suppose the embeddings e of each class c are Gaussian with mean ν_c and a covariance Σ shared by all classes, and every class is equally likely. Then the most probable class for an embedding e maximises the log-density of e under class c,

$$\log \mathcal{N}(e; \nu_c, \Sigma) = -\tfrac{1}{2}(e-\nu_c)^\top \Sigma^{-1}(e-\nu_c) + \text{const} = e^\top \Sigma^{-1}\nu_c - \tfrac{1}{2}\nu_c^\top \Sigma^{-1}\nu_c - \tfrac{1}{2}e^\top \Sigma^{-1} e + \text{const}.$$

The term $-\frac{1}{2}e^\top \Sigma^{-1} e$ is the same for every class, so it does not affect which class wins. What is left is linear in e: the logit of class c is $w_c^\top e + b_c$ with

$$w_c = \Sigma^{-1}\nu_c, \qquad b_c = -\tfrac{1}{2}\,\nu_c^\top \Sigma^{-1}\nu_c.$$

This is linear discriminant analysis (LDA). The usual LDA adds $\log \pi_c$, the class prior, to b_c, which favours frequent classes. Leaving it out makes the classifier *class-balanced*: it treats every class as equally likely, which is what balanced accuracy rewards. The classifier is the nearest class mean in the Mahalanobis distance $(e-\nu_c)^\top \Sigma^{-1}(e-\nu_c)$, a distance that measures each direction in units of the spread along it. LDA's directions are also those that maximise the ratio of the spread between class means to the spread within classes, which is why the gate's F was called a form of its ratio.

A two-dimensional example. Take two classes with means $\nu_A = (1, 1)$ and $\nu_B = (0, 0)$ and the shared covariance $\Sigma = \text{diag}(1,\, 0.25)$: the second coordinate is four times less noisy than the first. Then $\Sigma^{-1} = \text{diag}(1, 4)$, $w_A = (1, 4)$, $b_A = -\frac{1}{2}(1+4) = -2.5$, $w_B = 0$, $b_B = 0$, and class A wins when $x + 4y > 2.5$. The nearest-mean rule would instead decide by $x + y > 1$. For the point $e = (1.2,\, 0.3)$ the nearest-mean rule says A, since $1.5 > 1$, but LDA says B, since $1.2 + 1.2 = 2.4 < 2.5$. The point is far from A along the precise coordinate and close to B there, and LDA trusts that coordinate more (Fig. 6).

Shrinkage. In practice Σ is estimated, and the embedding dimension is large: d_e ranges from 80 (CNN-10) to 1024 (CNN-1) (Table 2). This is the fourth route of Chapter 3. Even with more images (18,485 on CIFAR-10-LT) than dimensions, the smallest eigenvalues of an estimated covariance are systematically too small, and since Σ^{-1} divides by them, their errors dominate the classifier. The readout therefore uses

$$\Sigma_\gamma = (1-\gamma)\Sigma + \gamma\,\frac{\operatorname{tr}\Sigma}{d_e}\,I, \qquad \gamma = 0.1,$$

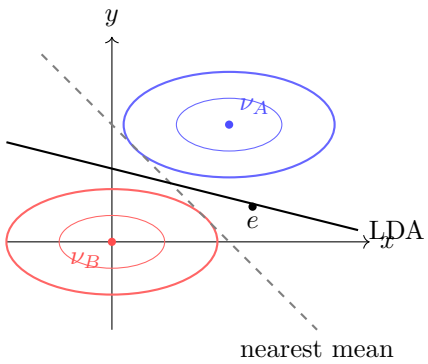


Figure 6: Illustration of the readout's decision rule (made-up numbers, not data). Ellipses: equal-density contours of two classes with a shared covariance that is narrow in y. Dashed: the nearest-mean boundary $x + y = 1$. Solid: the LDA boundary $x + 4y = 2.5$. Look at the point e: it is on A's side of the dashed line but on B's side of the solid one.

a mix of the estimate with a multiple of the identity that has the same average variance, and sets

$$w_c = \Sigma_\gamma^{-1}\nu_c, \qquad b_c = -\tfrac{1}{2}\,\nu_c^\top \Sigma_\gamma^{-1}\nu_c$$

(the paper's readout equation, `fedecs.lda_from_sums`). The paper's version uses a pseudo-inverse, and sets $b_c = -10^4$ for a class that no client holds, so that it is never predicted.

Carried through the example, $\Sigma_\gamma = 0.9\,\mathrm{diag}(1, 0.25) + 0.1 \cdot 0.625\,I = \mathrm{diag}(0.9625,\ 0.2875)$, so $w_A \approx (1.04,\ 3.48)$ and $b_A \approx -2.26$. For $e = (1.2, 0.3)$, $w_A^\top e = 1.04 \cdot 1.2 + 3.48 \cdot 0.3 \approx 2.29$ now exceeds $-b_A \approx 2.26$, so A's logit is about $+0.03$, above B's logit 0: with shrinkage the point goes back to A. Shrinkage pulls the rule part of the way from LDA toward the nearest-mean rule, trusting the precise direction less, and with it the estimates of the small variances, which are the least reliable part of the estimate.

How it is computed from sums. After Stage III the server sends every architecture's body to every client. Each client passes its real features through every body and computes, per architecture, its per-class counts, the per-class sums $\sum e$ of the embeddings, and the second moment $\sum ee^\top$. Secure aggregation sums them. From these the server gets the class means ν_c and the pooled within-class covariance, which is the total second moment minus $\sum_c n_c \nu_c \nu_c^\top$, divided by the number of images minus the number of classes. Everything is a function of sums, so by partition invariance the readout equals the same estimator computed centrally on the pooled embeddings of the same body. It is not the same as a last layer trained centrally by SGD.

What it is and is not. With the true means and covariance and $\gamma = 0$, and if the embeddings really were Gaussian with a shared covariance, this would be the Bayes classifier for equally likely classes. Computed from data with shrinkage, it is a plug-in estimate of that classifier. When the embeddings are not Gaussian with a shared covariance, which is the usual case, it is a linear classifier with no optimality guarantee. It belongs to a known family of closed-form federated classifiers: Fed3R (a ridge-regression classifier), FedNCM (nearest class means) and FedCOF (an LDA-type classifier with a covariance estimated from class means). What the paper adds is computing it *per architecture*, on bodies trained in the federation, with statistics from *all* clients, including those of other architectures. That is possible only because every client runs every architecture's body.

Where it helps and where it hurts. It helps most where a last layer was fitted to one client's prior, the main setting. It changes FedECS-LT very little on OrganAMNIST and lowers it with one shared model, where the last layer was trained by all clients; and its equal class priors lower the accuracy on each client's own class mix. Chapter 7 gives the numbers.

Cost. One extra round. Each client sends $C(d_e+1)+d_e^2$ numbers per architecture: C counts, C class sums of length d_e, and the $d_e \times d_e$ second moment. For CNN-1 with $d_e = 1024$ the second moment alone is about a million numbers. Every client must run a forward pass (no training) of every architecture's body on its own features once; a client that cannot do so would be left out of the sums.

It can be added to other methods. The readout uses only a head's body, never its trained last layer, so it can be added to any method whose heads have a body and a linear last layer. The *methods of the GeFL-F pipeline* are those that share GeFL-F's extractor and heads: GeFL-F, FedDF, Balanced Softmax, FedLC, FedRS and FedECS-LT. The paper reports each of them both without the readout and with it added ("ER"), which separates the readout's gain from the rest of each method. This is the comparison on which Chapter 7 turns.

5.6 The whole recipe

The paper's Algorithm 1 in words, one run:

1. **Stage I**: train the extractor ϕ and the heads by FedAvg; freeze ϕ; every client computes $h = \phi(x)$.
2. **Statistics release**: clients send $n_{kc}, S_{kc}^{(1)}, S_{kc}^{(2)}$ by secure aggregation; the server forms μ_c, V_c and the gate F.
3. **Stage II**: if $F \geq F_0$, train the anchored generator by FedAvg; otherwise GeFL-F's generator with class rows averaged by CCWA.
4. **Moment correction**: the server measures $\tilde{\mu}_c, \tilde{V}_c$ and sends $(\mu_c, \tilde{\mu}_c, s_c)$.
5. **Stage III**, for T_{III} rounds: the server sends the heads and a pool seed; the clients return their predictions on the pool by secure aggregation, giving the consensus soft labels; each client trains T_s epochs on corrected generated features with consensus soft labels, then T_r epochs on real features with logit adjustment; the server averages heads of the same architecture.
6. **Exact readout**: clients send embedding sums per architecture by secure aggregation; the server sets every last layer to the class-balanced LDA.

The settings are the same on every dataset: $F_0 = 0.05$, $\beta = 0.999$, 500 samples for the moment correction with $s_c \in [0.1, 10]$, $T_s = 10$, $T_r = 5$, $\tau = 1$, $\omega = 0.5$, $\gamma = 0.1$; the generator uses Adam with learning rate 10^{-3} and coupled decay 10^{-3}, as in GeFL-F.

Which component uses what. Three steps use the exact class statistics: the anchored generator (or CCWA), the moment correction, and the readout, which uses the corresponding statistics of the embeddings. Logit adjustment uses the client's own frequencies, consensus soft labels use the heads' predictions, and $T_s = 10$ is computation. The method's name describes the first group.

5.7 Cost and privacy

Beyond GeFL-F, FedECS-LT sends the class statistics once, the moment correction once, the consensus predictions every round, and the readout sums once. The measured totals are in Chapter 7.

What is revealed. Secure aggregation hides each client's own vectors. The server, and through the generator and the moment correction every client, learns the federation-level class means and spreads. For a class that one client holds, these equal that client's own statistics. For a class with few images they reveal more about each image than a mean over thousands would: each of class 9's 100 images enters its class mean with a weight of one hundredth. The features come from a shallow extractor, two convolutions and a pooling, so a class mean is close to a mean image at half resolution. The paper did not test how much of the images an inversion of the released means recovers. Formal differential privacy, adding calibrated noise to the sums, is possible but not part of the results, and it would not cover the FedAvg training of the generator and heads. The security model is an *honest-but-curious* server, one that follows the protocol but tries to learn what it can from what it receives; the paper says FedECS-LT should not be called privacy-preserving beyond what secure aggregation guarantees against such a server. Every client also receives every architecture's head (consensus) and body (readout), so the architectures are not secret, and every client must be able to run the largest of them.

How is such a method tested, and against what?

6 The study design

The experiments have to show three things: that the losses of Chapter 4 occur, that FedECS-LT recovers them, and which part of FedECS-LT does so. Every choice below serves one of these, or protects the comparison against a way of being unfair.

6.1 The research questions

- **RQ1, diagnosis.** Do the three losses occur in GeFL-F's own runs? Answered by the class rows, the readout gain and the logit spread (Chapter 4).
- **RQ2, effect.** Does FedECS-LT, ending with its readout, raise balanced accuracy over GeFL-F and the other model-heterogeneous methods, each as it is without the readout? Answered by the main comparison (Section 7.1).
- **RQ3, body or last layer.** How much of the difference remains when every method of the GeFL-F pipeline gets the same readout, so that only the heads' bodies differ? Answered by the readout comparison (Section 7.4).
- **RQ4, scope.** Does the effect hold with natural class imbalance and in the protocol with one shared model? Answered in Sections 7.6 and 7.7.
- **RQ5, components.** Which changes carry the effect? Answered by the ablations (Section 7.10).

RQ3 is the question that decides how the paper's claim must be worded, as Chapter 7 shows.

6.2 Datasets and splits

The long-tailed benchmarks. CIFAR-10-LT and CIFAR-100-LT are built by the paper with $\rho = 100$. GeFL-F uses half of CIFAR-10's training set, so the profile is applied to that half (and to 22% of CIFAR-100, which gives the usual CIFAR-100-LT shape). As Chapter 1 showed, the largest classes are capped, so the realised ratios are 48 and 96 (Table 1). The class index orders classes from the most to the least frequent, so the tail classes are the same in every run. MNIST, Fashion-MNIST and SVHN, made long-tailed the same way, complete the set of five long-tailed benchmarks.

The naturally imbalanced datasets. Six datasets keep their own class sizes, with training sets capped at 20,000 images: DermaMNIST, OrganAMNIST, BloodMNIST and PathMNIST (medical images), EMNIST ByClass (handwritten characters, 62 classes) and FER-2013 (facial expressions). Their realised ratios range from 2 to 75. On OrganAMNIST, BloodMNIST and PathMNIST the ratio is 5 or less, so there the results speak to label skew more than to a long tail. These six datasets were never used while the method was being developed, which makes them the cleanest evidence in the paper.

Splits. Each class is divided among $K = 10$ clients by a Dirichlet draw with $\alpha = 0.5$. The draw is repeated, at most 100 times, until every client holds at least ten images. A held-out block of training images that no client holds, 200 per class on CIFAR-10, forms the server's validation set. It has two uses only: it trains the referee of the fidelity measurement, and it sets the public bounds of secure aggregation. It is never used to select a model or a setting. Every reported number is on the official test set. The paper checked that every client's class counts are identical across methods for every dataset and seed.

Seeds. Every configuration runs with seeds 3, 4 and 5. A seed fixes the split and every method's initialisation, so two methods with the same seed see exactly the same clients: their results are *paired*. On seed 3 every method sees the split of the running example.

6.3 The two protocols

Different client models. The main setting is GeFL-F's: 10 clients, one per architecture, with GeFL-F's rounds ($T_{\mathrm{I}}, T_{\mathrm{II}}, T_{\mathrm{III}} = 50, 200, 100$ on CIFAR). All federated methods of this setting share the same Stage-I extractor for a given dataset and seed, so they differ only in what they do after Stage I.

One shared model. The second protocol is the one used by federated long-tail research, taken from the FedLTLib benchmark, whose settings come from CReFF: CIFAR-10-LT and CIFAR-100-LT at $\rho = 100$, 20 clients, 8 of them (40%) in each round, Dirichlet $\alpha = 0.5$, one ResNet-8 shared by all, 200 rounds of 10 local epochs (batch 32, SGD with learning rate 0.1, momentum 0.9, decay 0.99 per round). The baselines run their authors' LongTailLib code unchanged on the paper's splits, with ResNet-8 for every method.

FedECS-LT is fitted into this protocol by splitting the ResNet-8 after its second stage into a frozen extractor and a head. The extractor trains for 100 rounds, the generator for 100, and the head for 100 with 10 real epochs per round; so FedECS-LT uses the baselines' 200 training rounds plus 100 generator rounds. Two differences matter later: its head trains on frozen features of unaugmented images, while the baselines train the whole network end to end with

augmentation; and with a single architecture the consensus soft label is just the shared model's own prediction. FedECS-LT averages the clients' models with equal weights, as in the main setting, while the benchmark's FedAvg weights them by their numbers of samples; and each round's 8 clients are drawn by FedECS-LT's own seed and by the library's, so participation is not paired between FedECS-LT and the baselines.

6.4 The methods compared

Each group of methods answers a specific question.

- **GeFL-F**, the method FedECS-LT extends: the difference to it is the effect of the changes.
- **FedDF**, ensemble distillation on the server: after each round the server distils every architecture toward the ten architectures' mean prediction, for 20 steps. FedDF originally distils on public data; here it distils on GeFL-F's generated features, so that no method uses data that no client holds. It is the strongest generator-based competitor.
- **Per-client long-tail losses**: Balanced Softmax, FedLC and FedRS, applied to the heads with *no generator*. They test whether correcting the loss alone repairs the long tail. By the reparametrisation lemma their offsets add no information to the last layer, and Chapter 4 showed that the three are equal once the last layer is replaced by the readout.
- **Model-heterogeneous methods from the HtFLlib library**: prototypes (FedProto, FedTGP), a generator of embeddings (FedGen), a shared global head (FedGH), shared last layers (LG-FedAvg) and shared sub-networks (FedMRL). They represent the other ways of sharing knowledge between different models. They were designed for label skew without a global long tail and are ported to the frozen extractor with HtFLlib's settings.
- **Local**: each client trains its extractor and head alone. It is the reference without federation.
- **One-shared-model methods**: FedAvg, FedProx, MOON, FedLC, CCVR, CReFF, FedETF, Fed-GraB, FedLoGe, FedYoYo and RUCR, in the second protocol only.

Two further groups complete the comparison on CIFAR. GeFL's own grouped baselines (FedAvg, FedProx, FedALA and AvgKD, and the long-tail methods CCVR and FedETF, each within one architecture) ran on CIFAR-10-LT. A reference trains the same extractor and ten heads on all the training data pooled, without a generator; it is not a federated method but the ceiling of this design.

Fairness of the comparison. The paper's fairness table records what each method spends and exchanges. FedECS-LT trains 10 synthetic epochs per round against 1 for GeFL-F and FedDF and none for the methods without a generator; it exchanges consensus soft labels; and it ends with the readout. GeFL-F, FedDF and the three per-client losses are also reported with the readout added. The HtFLlib methods are not, so FedECS-LT's margin over them includes the readout's gain. No baseline was tuned on the paper's data. The paper calls a method's heads after Stage III, without the readout, its *heads as trained*.

6.5 Metrics

The primary metric is balanced accuracy averaged over the ten client models (Chapter 1). The others each answer a narrower question:

- **tail recall**, the mean recall of the tail classes (Section 4.1), measures whether the rare classes are recovered.
- **worst-class recall**, the lowest class recall after averaging over the models, shows whether any class is abandoned.
- **classes with zero recall for every model** counts the classes the federation fails completely.
- **accuracy on each client's own class mix**: the test accuracy re-weighted to the class frequencies of the model's own client. It measures how well a model serves its own client, which balanced accuracy deliberately ignores.
- **expected calibration error** (15 bins) measures how far the predicted probabilities are from the observed frequencies.
- **the weakest architecture's balanced accuracy** shows whether the mean over ten models hides a poor one.
- **GeFL's measure**, each model's best test accuracy over the evaluated rounds, given in the appendix for comparison with GeFL's paper. The main tables report the model after the last round, which involves no selection on the test set.
- **cost**: communication per client, wall-clock time (on a shared T4 GPU, so only indicative) and floating-point operations.

6.6 Statistics

Paired differences. A difference between FedECS-LT and a method is the mean of the per-seed differences over the seeds both have, with a 95% t interval and a paired t-test. Pairing removes the variation that comes from the split, because both methods see the same split on each seed.

A worked example with the run logs: with the readout, FedECS-LT minus Balanced Softmax on CIFAR-10-LT is 0.65, 1.30 and 2.34 points on seeds 3, 4 and 5. The mean is 1.43 and the standard deviation 0.86. The t statistic is $1.43/(0.86/\sqrt{3}) = 2.89$ with 2 degrees of freedom, giving an uncorrected two-sided $p = 0.10$. The 95% interval is $1.43 \pm 4.30 \cdot 0.86/\sqrt{3}$, which is [-0.7, +3.6]: it contains zero.

Holm's correction. A table compares FedECS-LT with many methods at once, and with many tests some will look significant by chance. Holm's procedure controls this. Sort the M p-values from smallest to largest, multiply the smallest by M, the next by $M - 1$, and so on, and keep each adjusted value at least as large as the one before. A difference is called significant only if its adjusted p is below 0.05. The family is every other method of the same table and setting. In the example the family is the five other methods of the pipeline, with uncorrected p of 0.068 (GeFL-F), 0.094 (FedRS), 0.097 (FedLC), 0.102 (Balanced Softmax)

and 0.126 (FedDF) (run logs). Holm multiplies them by 5, 4, 3, 2 and 1: 0.34, 0.375, 0.29, 0.20 and 0.126. Keeping each value at least as large as the one before turns the last three into 0.375. So GeFL-F's p becomes 0.34 and Balanced Softmax's 0.37.

Why three seeds are weak. Three paired differences give little power. A sign-flip permutation test, which assumes nothing about the distribution, cannot go below $p = 0.25$ with three pairs: of the $2^3 = 8$ ways to flip the signs, the observed pattern and its mirror are always 2 of the 8. The t-test reaches smaller values only because it assumes normally distributed differences. A result near $p = 0.05$ can also depend on which methods are in the Holm family.

The noise floor. GPU computation is not bit-reproducible, so two runs with the same seed differ. The paper measured this by running the BloodMNIST notebook twice with the same run list. The standard deviation of the difference between the two runs of one configuration is 1.2 points for heads as trained (from 39 repeated runs) and 0.6 with the readout (from 18). A mean of three such differences has a standard deviation $1/\sqrt{3} \approx 0.58$ times as large, and the paper treats differences smaller than twice that, about two standard deviations of the mean, as unresolved: $2 \cdot 0.58 \cdot 1.2 \approx 1.4$ points as trained and $2 \cdot 0.58 \cdot 0.6 \approx 0.7$ with the readout (1.4 and 0.7). Exceeding the floor is necessary, not sufficient: a difference above it counts as resolved only if its Holm-corrected test is also significant.

6.7 What the development saw

The settings of FedECS-LT were fixed during its development, before the reported runs. The development used seeds 0 to 5, including seeds 3 to 5 with the same client splits as the reported runs, and every run was evaluated on the same official test sets. It compared about 36 configurations of the method and its variants on CIFAR-10-LT and 17 on CIFAR-100-LT, plus runs on MNIST, Fashion-MNIST and SVHN. It never used the six naturally imbalanced datasets. The baselines were not tuned. So on the CIFAR benchmarks the reported numbers may favour FedECS-LT through this selection, which is why the natural datasets matter, and why a run on new seeds 6–8 was added (Section 7.1).

6.8 Threats to validity

The paper lists these threats in its design section. Each one changes how a result may be read.

- **Compute.** FedECS-LT trains longer and communicates more. The matched-epoch runs, GeFL-F and FedDF with ten synthetic epochs, test whether the longer synthetic phase explains the lead of its heads (Section 7.10); the methods were not compared at matched communication or time.
- **Missing runs.** Some settings have fewer than three seeds, and those values carry no interval or a very wide one: EMNIST (one seed), CIFAR-100-LT with one shared model (seeds 3 and 4 for every method, but only seed 4 for FedECS-LT and FedLoGe), and CIFAR-10-LT with one shared model (seeds 3 and 4 only for FedECS-LT, CCVR, FedGraB, FedLC, FedYoYo and RUCR). With one shared model some runs of FedECS-LT failed where the baselines finished, so the missing runs are not random.

- **Ports.** The HtFLlib methods run on a frozen extractor with settings meant for end-to-end training, which may not suit them.
- **The mean over models.** Balanced accuracy averages ten models of different sizes, so a large gain on small heads and a small one on large heads give the same number; the weakest architecture is reported for this reason.
- **The readout comparison.** The readout is the same linear classifier on every body, so accuracy with it measures the bodies only through that classifier.
- **The validation set.** The server holds a small validation set for the diagnostics and the bounds; a deployment without such data would need another source for the bounds.
- **The long tail is synthetic** on the benchmarks, with the same tail classes in every run.

What do the results show?

7 The results, read table by table

The results follow the order of the paper's results section. Unless a caption says otherwise, a cell is the mean ± standard deviation over seeds 3–5, a difference is FedECS-LT minus the other method, paired over the seeds both have, and "significant" means $p < 0.05$ after Holm's correction (Section 6.6). The noise floor is 1.4 points for heads as trained and 0.7 with the readout.

Two labels recur. *FedECS-LT* is the full method, ending with the exact readout. *FedECS-LT (heads only)*, the paper's table label, is the same run before the readout: FedECS-LT's heads as trained. Every other method appears with its heads as trained in the main tables, as its authors defined it; in Section 7.4 the readout is added to the methods of the GeFL-F pipeline.

7.1 The main comparison

The question. RQ2 asks whether FedECS-LT raises balanced accuracy over every published method when clients have different models and the training set has a long tail.

How to read the tables. Table 4 is the paper's main table: one row per method, one column per benchmark, the best mean in each column in bold. Table 5 is its paired-difference table: each cell is FedECS-LT minus the row's method, with the 95% interval in brackets, bold where the difference is significant. A difference whose interval excludes zero but is not bold passed the uncorrected test and failed Holm's correction.

The numbers. On CIFAR-10-LT FedECS-LT reaches 52.6 ± 1.3, against 37.5 ± 1.2 for the strongest other method, FedDF: a margin of +15.1 points with Holm-corrected $p = 0.0072$. On CIFAR-100-LT it reaches 18.7 ± 0.2 against 10.0 ± 0.5 for FedDF, a margin of +8.6 with $p = 0.0042$. Against GeFL-F the differences are +18.9 [+16.3, +21.6] and +11.0 [+10.2, +11.8]. On CIFAR-100-LT no class has zero recall for all ten models of FedECS-LT (0), while 12.3 classes on average are recognised by none of the models of FedDF.

Table 4: Balanced accuracy (%), the paper's main table. Look at the first three rows: the full method, its heads as trained, and GeFL-F; then at the strongest other method in each column.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
FedECS-LT	**94.4 ± 0.2**	**81.2 ± 0.9**	**64.8 ± 1.9**	**52.6 ± 1.3**	**18.7 ± 0.2**
FedECS-LT (heads only)	94.7 ± 0.4	79.7 ± 1.2	62.9 ± 1.4	42.8 ± 2.0	14.3 ± 0.6
GeFL-F	71.6 ± 3.2	65.2 ± 5.3	50.0 ± 1.9	33.7 ± 1.2	7.7 ± 0.4
Balanced Softmax	64.8 ± 2.1	57.5 ± 1.7	33.8 ± 2.7	36.3 ± 1.2	9.0 ± 0.3
FedLC	61.6 ± 2.3	52.8 ± 1.1	30.5 ± 2.4	34.3 ± 1.1	8.5 ± 0.3
FedRS	61.1 ± 2.3	52.0 ± 1.1	30.1 ± 2.4	34.1 ± 1.1	8.5 ± 0.3
FedDF	76.1 ± 2.9	66.6 ± 5.0	41.4 ± 2.5	37.5 ± 1.2	10.0 ± 0.5
Local	60.6 ± 1.7	52.3 ± 1.4	29.2 ± 1.2	32.1 ± 0.7	7.9 ± 0.8
FedProto	59.7 ± 2.9	49.6 ± 1.4	24.1 ± 1.9	27.1 ± 0.8	4.8 ± 0.3
FedTGP	38.4 ± 24.6	46.1 ± 1.7	23.3 ± 2.8	25.3 ± 1.2	4.5 ± 0.6
FedGen	56.3 ± 2.1	48.7 ± 1.1	28.6 ± 2.1	26.9 ± 2.0	4.5 ± 1.3
FedGH	60.8 ± 2.4	49.4 ± 0.9	28.1 ± 2.1	31.9 ± 1.1	6.5 ± 0.1
LG-FedAvg	60.9 ± 1.9	49.9 ± 1.3	28.9 ± 2.2	31.3 ± 0.8	6.3 ± 0.1
FedMRL	62.1 ± 2.3	52.4 ± 0.9	30.7 ± 2.2	33.7 ± 1.0	8.3 ± 0.2
FedAvg	-	-	-	34.3 ± 1.0	-
FedProx	-	-	-	34.3 ± 1.0	-
FedALA	-	-	-	34.3 ± 1.0	-
AvgKD	-	-	-	10.2 ± 0.3	-
CCVR	-	-	-	33.7 ± 0.9	-
FedETF	-	-	-	31.3 ± 1.2	-
Centralised (pooled data)	-	-	-	57.5 ± 0.2	22.4 ± 0.1

The heads as trained. Before the readout the heads of FedECS-LT reach 42.8 ± 2.0 and 14.3 ± 0.6. That is +5.2 points ahead of FedDF on CIFAR-10-LT, with $p = 0.099$, not significant, and +4.3 ahead on CIFAR-100-LT, with $p = 0.021$, significant. The readout itself adds +9.8 and +4.4 points to the heads. Of the +15.1-point margin on CIFAR-10-LT, therefore, about a third comes from the heads and two thirds from the readout.

The other benchmarks. On MNIST, Fashion-MNIST and SVHN the pattern is the same: FedECS-LT reaches 94.4 ± 0.2, 81.2 ± 0.9 and 64.8 ± 1.9, ahead of the strongest other method by +18.3, +14.6 and +14.8 points (Holm-corrected $p = 0.022$, 0.091 and 0.0013; Fashion-MNIST's is not significant). FedECS-LT has the highest mean on all five long-tailed benchmarks.

New client splits. Seeds 6–8 draw splits that the development never used (Section 6.7). On them FedECS-LT reaches 51.9 ± 1.0 on CIFAR-10-LT, against 52.6 ± 1.3 on seeds 3–5, and its margins over the strongest of GeFL-F, FedDF and Balanced Softmax are +14.8 and +8.6 points with heads as trained for the others, and +1.0 and +1.3 with the readout for all (Holm-corrected $p = 0.066$ and 0.13). The margins on new splits are like those on the development splits, so they show no sign that choosing the settings on seeds 3–5 inflated them.

The pooled-data ceiling. The same extractor and heads trained on all training images in one place reach 57.5 ± 0.2 on CIFAR-10-LT and 22.4 ± 0.1 on CIFAR-100-LT, and 64.6 ± 0.2 and 25.4 ± 0.2 with the readout. This is not a federated method but the ceiling of the design: FedECS-LT, at 52.6 ± 1.3 and 18.7 ± 0.2, is several points below it, so federation still costs accuracy; and even the ceiling is low, which suggests that the low absolute numbers come mostly from the small extractor and the long tail.

Table 5: FedECS-LT minus each method (points), paired over seeds 3–5, with the 95% t interval; bold: significant after Holm's correction. The paper's paired-difference table. Look at the smallest difference in each column: it belongs to the strongest other method.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
GeFL-F	**+22.8 [+14.5, +31.2]**	+16.0 [+0.8, +31.3]	**+14.8 [+13.9, +15.8]**	**+18.9 [+16.3, +21.6]**	**+11.0 [+10.2, +11.8]**
Balanced Softmax	**+29.6 [+23.8, +35.4]**	**+23.6 [+17.4, +29.9]**	**+31.0 [+27.4, +34.5]**	**+16.3 [+13.5, +19.0]**	**+9.7 [+8.9, +10.5]**
FedLC	**+32.8 [+26.4, +39.2]**	**+28.4 [+23.8, +33.0]**	**+34.3 [+31.8, +36.8]**	**+18.3 [+16.2, +20.5]**	**+10.2 [+9.4, +11.0]**
FedRS	**+33.3 [+26.9, +39.7]**	**+29.2 [+24.6, +33.8]**	**+34.6 [+32.3, +37.0]**	**+18.5 [+16.4, +20.6]**	**+10.2 [+9.5, +11.0]**
FedDF	**+18.3 [+10.5, +26.1]**	+14.6 [+0.0, +29.2]	**+23.4 [+19.6, +27.2]**	**+15.1 [+12.6, +17.5]**	**+8.6 [+7.3, +10.0]**
Local	**+33.9 [+29.2, +38.5]**	**+28.8 [+23.7, +33.9]**	**+35.6 [+33.6, +37.7]**	**+20.5 [+17.2, +23.9]**	**+10.7 [+8.6, +12.8]**
FedProto	**+34.7 [+27.3, +42.2]**	**+31.6 [+26.0, +37.2]**	**+40.6 [+39.4, +41.9]**	**+25.5 [+24.2, +26.8]**	**+13.9 [+13.5, +14.4]**
FedTGP	+56.1 [-4.6, +116.7]	**+35.1 [+28.6, +41.5]**	**+41.5 [+37.6, +45.5]**	**+27.3 [+25.4, +29.2]**	**+14.2 [+13.0, +15.4]**
FedGen	**+38.1 [+32.4, +43.8]**	**+32.5 [+27.9, +37.1]**	**+36.2 [+35.6, +36.7]**	**+25.7 [+23.4, +28.1]**	**+14.1 [+10.5, +17.8]**
FedGH	**+33.6 [+27.1, +40.2]**	**+31.8 [+27.3, +36.2]**	**+36.7 [+36.3, +37.1]**	**+20.7 [+18.1, +23.3]**	**+12.1 [+11.8, +12.5]**
LG-FedAvg	**+33.6 [+28.3, +38.8]**	**+31.3 [+26.1, +36.4]**	**+35.9 [+35.0, +36.7]**	**+21.3 [+19.2, +23.4]**	**+12.4 [+12.1, +12.7]**
FedMRL	**+32.3 [+26.0, +38.7]**	**+28.8 [+24.3, +33.2]**	**+34.1 [+32.3, +35.8]**	**+18.9 [+16.8, +21.0]**	**+10.4 [+9.9, +10.9]**
FedAvg	-	-	-	**+18.3 [+16.2, +20.4]**	-
FedProx	-	-	-	**+18.3 [+16.2, +20.4]**	-
FedALA	-	-	-	**+18.3 [+16.2, +20.4]**	-
AvgKD	-	-	-	**+42.4 [+38.5, +46.4]**	-
CCVR	-	-	-	**+18.9 [+16.9, +20.9]**	-
FedETF	-	-	-	**+21.3 [+19.3, +23.3]**	-

What it shows. The measured statement is narrow: the full method, with its readout, is above every published method of this setting as that method was published, by a large and significant margin on both benchmarks. The heads as trained are also ahead, by less, and the CIFAR-10-LT part of that is not resolved by three seeds.

What it does not show. It does not show that the components before the readout are what helps. Every other method in this table lacks the readout, and the readout is a known kind of classifier (Section 5.5) that can be added to most of them. The comparison that answers this follows in Section 7.4.

7.2 The other model-heterogeneous methods

The question. These methods share prototypes, a generator of embeddings or a shared sub-network; the question is whether any of them does better than the generator-based ones under a long tail.

The answer. None does. In Table 4 FedProto, FedTGP, FedGen, FedGH, LG-FedAvg and FedMRL are close to or below Local. The paper notes that the methods exchanging prototypes or shared sub-networks (all but FedGen) give an architecture no information about the classes its own clients lack. A plausible reading is that a prototype of class 9 is only useful to a head that already predicts class 9. FedProto, FedTGP and FedGen also decline during training. They are best in the first rounds and lose 5.7 ± 1.0, 6.7 ± 0.7 and 5.3 ± 0.9 points by the last round on CIFAR-10-LT. The heads of FedECS-LT decline too, by 3.4 ± 1.2 points on CIFAR-10-LT. The paper's appendix gives every method's best round, the measure GeFL reports; the readout is computed once, after the last round, so it has no best round.

GeFL's grouped baselines. On CIFAR-10-LT the baselines of GeFL's own comparison were also run. With one client per architecture, FedAvg, FedProx and FedALA within an architecture have nothing to average and reach 34.3 ± 1.0, 34.3 ± 1.0 and 34.3 ± 1.0, the level of local training on the shared extractor; CCVR and FedETF reach 33.7 ± 0.9 and 31.3 ± 1.2. AvgKD falls to 10.2 ± 0.3, chance level, with a worst-class recall of 0.0 ± 0.0: its models predict one class. Its targets are a softmax of the label plus the other nine architectures'

Table 6: Accuracy (%) on each client's own class mix, from the paper's appendix; FedECS-LT with its readout, other methods with heads as trained. Look at the first two rows: the readout lowers this measure.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
FedECS-LT	**98.2 ± 0.2**	88.4 ± 0.3	80.6 ± 1.8	59.2 ± 1.8	28.3 ± 0.3
FedECS-LT (heads only)	98.3 ± 0.2	89.0 ± 0.4	81.1 ± 1.0	68.6 ± 1.9	31.5 ± 0.3
GeFL-F	97.6 ± 0.0	**90.8 ± 0.4**	**84.9 ± 0.2**	73.0 ± 2.3	31.1 ± 0.6
Balanced Softmax	96.4 ± 0.1	89.2 ± 0.8	80.7 ± 0.2	72.8 ± 2.3	33.1 ± 0.7
FedLC	96.6 ± 0.2	89.9 ± 0.8	81.9 ± 0.2	74.2 ± 2.1	34.7 ± 0.7
FedRS	96.5 ± 0.2	89.9 ± 0.7	81.9 ± 0.2	74.2 ± 2.1	**34.8 ± 0.8**
FedDF	97.6 ± 0.1	90.5 ± 0.3	81.8 ± 1.4	71.5 ± 2.2	32.9 ± 1.1
Local	96.4 ± 0.3	90.0 ± 0.7	81.0 ± 0.4	72.7 ± 2.6	32.3 ± 2.4
FedProto	93.1 ± 0.5	85.9 ± 1.0	63.4 ± 1.6	61.3 ± 1.1	17.0 ± 1.3
FedTGP	71.3 ± 30.2	83.0 ± 1.2	65.3 ± 2.6	62.7 ± 3.4	21.1 ± 1.3
FedGen	94.8 ± 0.6	88.3 ± 0.4	78.3 ± 0.4	67.0 ± 2.7	22.0 ± 4.2
FedGH	96.6 ± 0.1	89.7 ± 0.8	81.1 ± 0.3	72.6 ± 2.3	29.4 ± 0.8
LG-FedAvg	96.5 ± 0.1	89.6 ± 0.6	80.7 ± 0.2	71.0 ± 2.2	28.0 ± 0.4
FedMRL	96.7 ± 0.1	89.9 ± 0.7	81.9 ± 0.2	73.5 ± 2.2	33.7 ± 0.7
FedAvg	-	-	-	74.3 ± 2.0	-
FedProx	-	-	-	**74.4 ± 2.1**	-
FedALA	-	-	-	74.3 ± 2.1	-
AvgKD	-	-	-	16.9 ± 4.8	-
CCVR	-	-	-	73.4 ± 1.8	-
FedETF	-	-	-	70.6 ± 1.8	-
Centralised (pooled data)	-	-	-	76.8 ± 0.2	40.2 ± 0.2

predicted probabilities, exactly as in GeFL's code; a plausible reading, not tested, is that under label skew the nine biased predictions outweigh the label and every model drifts to the same class.

What it does not show. These methods run as ports onto the frozen extractor with settings from their library, meant for end-to-end training (Chapter 6, threats). Their low numbers may partly be the port. The paper did not run a check of the ports.

7.3 Accuracy on the clients' own class mixes

The question. Balanced accuracy weights every class equally. This measure re-weights the test images to each client's own class frequencies, so it gives the accuracy each client actually sees.

The numbers. FedECS-LT reaches 59.2 ± 1.8 on CIFAR-10-LT and 28.3 ± 0.3 on CIFAR-100-LT, and its heads as trained 68.6 ± 1.9 and 31.5 ± 0.3 (Table 6). GeFL-F reaches 73.0 ± 2.3 on CIFAR-10-LT and Local 72.7 ± 2.6. FedECS-LT is below 16 of the 17 other federated methods on CIFAR-10-LT and 7 of 11 on CIFAR-100-LT. The readout lowers the measure by about nine points on CIFAR-10-LT.

Why. A client whose test images are mostly class 0 is best served by a last layer that favours class 0. The readout's equal class priors remove exactly that preference, which explains its measured effect; logit adjustment in the real phase may do the same to the heads, but its share

Table 7: Balanced accuracy (%) with every last layer set by the exact readout, the paper's readout table. Methods of the GeFL-F pipeline only. Compare each row with its value in Table 4: the readout raises every method.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
FedECS-LT	**94.4 ± 0.2**	**81.2 ± 0.9**	**64.8 ± 1.9**	**52.6 ± 1.3**	**18.7 ± 0.2**
GeFL-F	91.0 ± 0.3	79.8 ± 0.3	63.7 ± 1.7	50.3 ± 1.2	14.9 ± 0.2
Balanced Softmax	90.0 ± 0.9	77.9 ± 1.5	54.2 ± 2.6	51.2 ± 0.7	17.2 ± 0.3
FedLC	90.0 ± 0.9	77.9 ± 1.4	54.3 ± 2.5	51.2 ± 0.7	17.2 ± 0.3
FedRS	90.0 ± 0.9	77.9 ± 1.4	54.3 ± 2.5	51.1 ± 0.7	17.2 ± 0.3
FedDF	92.2 ± 0.4	80.2 ± 0.5	63.9 ± 1.9	51.0 ± 1.2	15.8 ± 0.3
Centralised (pooled data)	-	-	-	64.6 ± 0.2	25.4 ± 0.2

Table 8: FedECS-LT minus each method, both with the readout (points), paired over seeds 3–5, with the 95% t interval; bold: significant after Holm's correction. From the paper's appendix. Look at whether the intervals contain zero.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
GeFL-F	**+3.4 [+2.7, +4.1]**	+1.4 [-0.3, +3.0]	+1.1 [-0.1, +2.3]	+2.3 [-0.4, +5.0]	**+3.8 [+3.1, +4.5]**
Balanced Softmax	**+4.4 [+2.7, +6.2]**	+3.3 [+1.5, +5.1]	**+10.6 [+8.4, +12.7]**	+1.4 [-0.7, +3.6]	+1.5 [+0.6, +2.4]
FedLC	**+4.4 [+2.7, +6.1]**	+3.3 [+1.8, +4.8]	**+10.5 [+8.5, +12.6]**	+1.4 [-0.6, +3.5]	+1.5 [+0.6, +2.4]
FedRS	**+4.4 [+2.8, +6.1]**	+3.3 [+1.7, +4.9]	**+10.5 [+8.5, +12.5]**	+1.5 [-0.6, +3.5]	+1.5 [+0.6, +2.4]
FedDF	**+2.2 [+1.8, +2.7]**	+1.0 [-0.1, +2.1]	+0.9 [+0.1, +1.7]	+1.6 [-1.1, +4.3]	**+2.9 [+2.1, +3.6]**

is not measured. A deployment that cares about each client's own accuracy could add each client's own log-prior back to the readout's biases at prediction time, the reverse of post-hoc logit adjustment (Section 4.2); the paper did not test this.

7.4 The same readout for every method

The question. RQ3 asks how much of FedECS-LT's margin remains when every method of the GeFL-F pipeline gets the same readout. Its answer decides how the paper's claim must be worded.

Why this is the fair comparison of the bodies. With the readout, every last layer is replaced by the same estimator, computed from the same kind of pooled statistics, through the same procedure. What still differs between two methods is the body that produced the embeddings. So the difference with the readout measures what FedECS-LT's other components (the anchored generator, the moment correction, consensus soft labels, logit adjustment and ten synthetic epochs) do to the bodies, read through one linear classifier. The comparison without the readout measures the methods as published. A reader needs both: the first says whether FedECS-LT beats what exists; the second says whether its parts beyond a known classifier contribute.

The numbers. With the readout (Tables 7 and 8) FedECS-LT is +2.3 points [-0.4, +5.0] ahead of GeFL-F on CIFAR-10-LT and +3.8 [+3.1, +4.5] on CIFAR-100-LT. Against the strongest other method with the readout, Balanced Softmax on CIFAR-10-LT and FedRS on CIFAR-100-LT, the margins are +1.4 [-0.7, +3.6] and +1.5 [+0.6, +2.4], with Holm-corrected $p = 0.37$ and 0.058. On CIFAR-100-LT the uncorrected interval excludes zero but the corrected test does not reach 0.05. The differences to GeFL-F and FedDF on CIFAR-100-LT stay

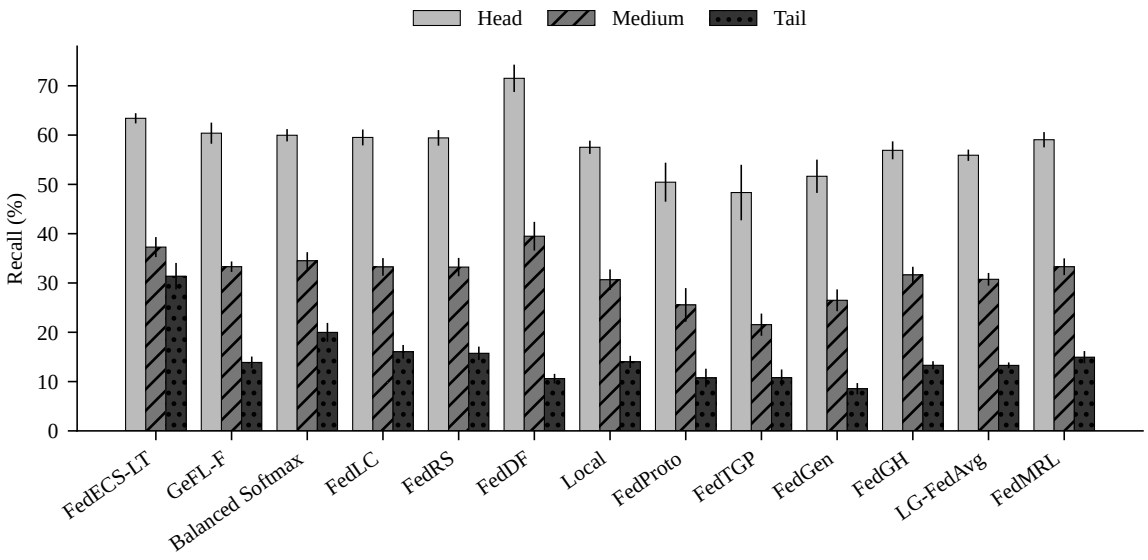


Figure 7: Mean recall of the head, medium and tail classes on CIFAR-10-LT, mean over seeds 3–5, error bars one standard deviation; from the paper's appendix. Look at the tail group, where the methods differ most.

significant ($p = 0.0095$ and 0.014).

What it shows. Three things. First, the readout raises every method of the pipeline by a large amount: Balanced Softmax gains +14.8 points on CIFAR-10-LT, GeFL-F +16.6. Second, once every method has it, the methods are close. Third, Balanced Softmax with the readout reaches 51.2 ± 0.7 on CIFAR-10-LT. With one client per architecture, Balanced Softmax trains every head on its own client's data with no generator and no exchange after Stage I. So a body trained alone, plus the readout computed over all clients, leaves the full method a lead of only +1.4 points. Most of the margin of Section 7.1 is the readout's.

What it does not show. It does not show that the other components do nothing. Margins of +1.4 and +1.5 points exceed the noise floor of 0.7, but their Holm-corrected tests are not significant, so with three seeds they are neither shown nor ruled out. It also does not show the components' effect one by one, which is the subject of the ablations (Section 7.10). And because the readout is one fixed linear classifier, a body that is better for another last layer would not show it here.

7.5 Rare classes

The question. If FedECS-LT addresses the long tail, its gain should be largest on the rare classes.

How to read it. Table 9 gives the mean recall of the tail classes (60–99 on CIFAR-100-LT). Figure 7 splits the recall on CIFAR-10-LT into head, medium and tail classes, and Fig. 8 plots each class's recall against its number of training images on CIFAR-100-LT.

The numbers. Against GeFL-F on CIFAR-10-LT, FedECS-LT gains +36.4 points on the tail classes, +11.8 on the medium ones and +2.7 on the head classes. Its tail recall is 50.3 ± 1.5 against 13.9 ± 1.2. Against FedDF the difference is +39.7 points on the tail classes

Table 9: Recall (%) of the tail classes, the 40% least frequent; FedECS-LT with its readout, other methods with heads as trained. From the paper's tail table. Compare FedECS-LT with its heads as trained and with GeFL-F.

Method	MNIST	Fashion-MNIST	SVHN	CIFAR-10	CIFAR-100
FedECS-LT	**90.2 ± 1.1**	**73.5 ± 1.8**	**46.6 ± 2.5**	**50.3 ± 1.5**	**8.2 ± 0.2**
FedECS-LT (heads only)	90.9 ± 0.3	73.2 ± 2.7	46.0 ± 1.5	31.4 ± 2.7	6.4 ± 0.3
GeFL-F	44.0 ± 8.2	45.7 ± 11.9	24.0 ± 3.0	13.9 ± 1.2	1.7 ± 0.1
Balanced Softmax	43.5 ± 7.2	39.9 ± 6.8	12.8 ± 1.6	20.0 ± 1.9	2.2 ± 0.1
FedLC	37.8 ± 7.6	32.8 ± 5.7	8.3 ± 0.8	16.1 ± 1.4	1.7 ± 0.1
FedRS	37.0 ± 7.6	31.6 ± 5.8	8.0 ± 0.7	15.7 ± 1.4	1.7 ± 0.1
FedDF	45.1 ± 7.6	46.8 ± 12.0	10.1 ± 1.2	10.6 ± 1.0	0.8 ± 0.1
Local	35.7 ± 6.0	31.8 ± 5.2	7.2 ± 0.9	14.0 ± 1.2	1.6 ± 0.2
FedProto	41.5 ± 5.9	29.7 ± 8.3	4.0 ± 0.8	10.7 ± 1.9	0.9 ± 0.0
FedTGP	21.4 ± 18.6	30.3 ± 5.7	6.9 ± 1.7	10.8 ± 1.7	1.2 ± 0.5
FedGen	29.9 ± 5.7	28.7 ± 5.6	7.4 ± 0.3	8.6 ± 1.1	0.7 ± 0.3
FedGH	36.3 ± 8.2	27.9 ± 5.2	6.1 ± 0.2	13.3 ± 0.8	1.1 ± 0.1
LG-FedAvg	36.7 ± 7.3	27.8 ± 5.8	6.6 ± 0.5	13.3 ± 0.6	1.0 ± 0.0
FedMRL	38.5 ± 7.7	32.4 ± 5.5	8.5 ± 0.6	14.9 ± 1.2	1.7 ± 0.1
FedAvg	-	-	-	15.9 ± 1.2	-
FedProx	-	-	-	15.7 ± 1.2	-
FedALA	-	-	-	15.9 ± 1.2	-
AvgKD	-	-	-	0.0 ± 0.0	-
CCVR	-	-	-	15.3 ± 0.9	-
FedETF	-	-	-	13.9 ± 0.9	-
Centralised (pooled data)	-	-	-	39.4 ± 0.4	6.6 ± 0.2

and -8.4 on the head classes. On CIFAR-100-LT the gain over GeFL-F is spread over the three groups (head +12.6, medium +15.4, tail +6.5). There the tail recall is 8.2 ± 0.2 against 1.7 ± 0.1, and the worst-class recall 0.2 ± 0.2 against 0.0 ± 0.0: some class is still lost on CIFAR-100-LT.

With the readout for every method. The tail gain over the per-client losses disappears. FedECS-LT minus Balanced Softmax, both with the readout, is -0.03 points of tail recall on CIFAR-10-LT and -0.1 on CIFAR-100-LT. Against GeFL-F with the readout a tail gain remains, +2.8 [-0.2, +5.8] on CIFAR-10-LT and +1.8 [+1.3, +2.3] on CIFAR-100-LT, significant on CIFAR-100-LT ($p = 0.021$).

What it shows and does not. The long-tail gain is measured where it should be, on the rare classes, and on CIFAR-10-LT it is paid for with head-class recall against FedDF. The same-readout numbers say where it comes from: from the last layer. The part that remains against GeFL-F is consistent with the components before the readout helping the bodies of GeFL-F's own pipeline; against a body trained without any generator the difference is unresolved and close to zero.

7.6 Natural class imbalance

The question. The first half of RQ4 asks whether the result carries over to datasets whose imbalance is their own and which played no part in the development of the method. It is the cleanest test in the paper (Section 6.7).

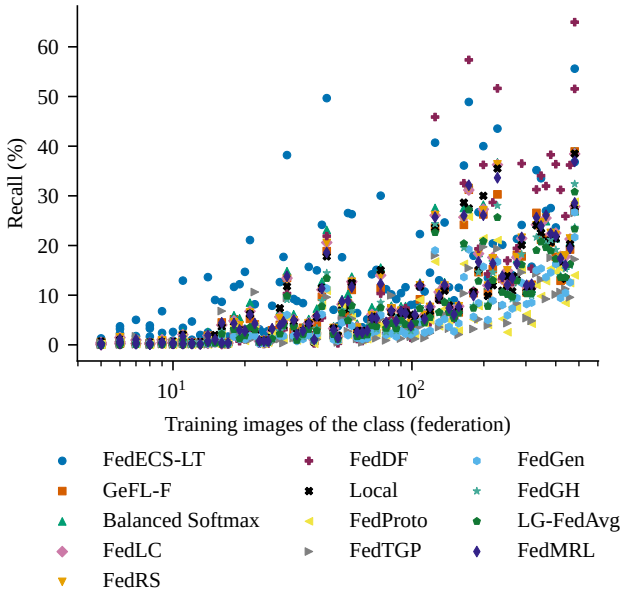


Figure 8: Recall of each class of CIFAR-100-LT against its number of training images in the federation (logarithmic axis); each point is one class, mean over seeds 3–5. Look at the left side of the plot, the rarest classes, where the methods separate.

The numbers. With heads as trained for the others (Table 10), FedECS-LT has the highest mean on all six datasets. Its margin over the strongest other method runs from +6.4 (OrganAMNIST) to +18.4 points (PathMNIST), significant on three of the five datasets with three seeds; EMNIST (ByClass) has one seed, so no test. With the readout for every method of the pipeline (Table 11), the margins run from -0.03 (BloodMNIST, against FedDF) to +0.9 (FER-2013). None is significant after Holm's correction (the smallest p, on OrganAMNIST, is 0.051). All but the BloodMNIST margin exceed the noise floor of 0.7 points, which is necessary but not sufficient for a resolved difference. On BloodMNIST, FedDF with the readout has the higher mean. The readout changes FedECS-LT itself by +11.6 points on PathMNIST and by -0.3 on OrganAMNIST, where it slightly lowers the heads' accuracy. On FER-2013, SVHN the gate chose the generator with class rows. GTSRB, a seventh dataset, had not returned when this text was written.

What it shows. On data the development never saw, the pattern of the CIFAR benchmarks repeats: a large margin as published, a small and unresolved one once every method has the readout. That the pattern repeats suggests that the CIFAR result is not an artefact of tuning. That the same-readout margin stays small suggests that the readout carries the result here too.

What it does not show. On OrganAMNIST, BloodMNIST and PathMNIST the realised imbalance ratio is 5 or less (Table 1), so these three test label skew more than a long tail.

7.7 One shared model

The question. The second half of RQ4 asks how FedECS-LT compares with the federated long-tail methods when all clients can run the same model. It is a test of scope, outside the setting the method was built for.

Table 10: Balanced accuracy (%) on the six naturally imbalanced datasets, the paper's natural-imbalance table; FedECS-LT with its readout, other methods with heads as trained. A value without ± is from one seed. Look at the gap between the first row and the rest.

Method	DermaMNIST	OrganAMNIST	BloodMNIST	PathMNIST	EMNIST (ByClass)	FER-2013
FedECS-LT	**45.4 ± 1.9**	**83.3 ± 1.3**	**86.3 ± 1.3**	**73.6 ± 0.4**	**67.3**	**39.2 ± 1.0**
FedECS-LT (heads only)	36.8 ± 0.8	83.7 ± 2.5	84.2 ± 2.0	61.9 ± 3.2	62.1	30.9 ± 1.5
GeFL-F	27.3 ± 0.3	76.9 ± 3.5	78.5 ± 2.2	55.2 ± 2.3	49.8	27.5 ± 0.2
Balanced Softmax	28.6 ± 0.1	68.1 ± 4.8	69.9 ± 3.8	54.6 ± 2.2	45.6	26.6 ± 0.4
FedLC	26.0 ± 0.7	63.9 ± 4.4	66.5 ± 3.9	51.9 ± 2.6	42.1	25.7 ± 0.2
FedRS	26.0 ± 0.6	63.5 ± 4.4	66.0 ± 3.9	52.6 ± 1.4	41.4	25.7 ± 0.3
FedDF	20.5 ± 1.4	64.7 ± 6.1	70.6 ± 7.5	48.2 ± 1.2	47.2	25.7 ± 0.3
Local	25.3 ± 0.5	63.5 ± 4.2	63.6 ± 3.6	49.3 ± 3.4	41.4	25.2 ± 0.5
FedProto	25.5 ± 1.5	58.6 ± 4.1	65.4 ± 4.5	54.0 ± 0.8	39.4	20.8 ± 0.5
FedTGP	24.7 ± 1.0	50.7 ± 3.9	59.5 ± 2.4	49.8 ± 1.3	34.8	20.6 ± 0.7
FedGen	26.0 ± 0.6	60.1 ± 5.1	64.1 ± 3.2	51.7 ± 0.5	32.2	24.4 ± 0.5
FedGH	27.1 ± 0.2	61.8 ± 4.2	65.9 ± 3.6	53.8 ± 1.2	38.7	24.7 ± 0.4
LG-FedAvg	26.8 ± 0.4	62.6 ± 4.3	65.9 ± 3.2	53.3 ± 1.2	38.5	24.7 ± 0.6
FedMRL	27.1 ± 0.3	64.2 ± 4.3	67.2 ± 3.5	53.7 ± 1.0	42.1	25.9 ± 0.5

Table 11: The same datasets with the exact readout for every method of the GeFL-F pipeline, from the paper's appendix. Look at how close the rows are.

Method	DermaMNIST	OrganAMNIST	BloodMNIST	PathMNIST	EMNIST (ByClass)	FER-2013
FedECS-LT	**45.4 ± 1.9**	**83.3 ± 1.3**	86.3 ± 1.3	**73.6 ± 0.4**	**67.3**	**39.2 ± 1.0**
GeFL-F	44.6 ± 1.6	82.5 ± 1.0	86.3 ± 0.4	72.3 ± 0.5	66.5	38.2 ± 0.7
Balanced Softmax	42.8 ± 0.8	79.0 ± 1.4	82.9 ± 1.2	70.6 ± 0.6	64.5	35.7 ± 0.8
FedLC	43.0 ± 0.9	79.1 ± 1.3	83.0 ± 1.0	70.7 ± 0.7	64.6	35.6 ± 0.7
FedRS	43.1 ± 0.9	79.0 ± 1.3	82.9 ± 1.0	70.8 ± 0.8	64.5	35.5 ± 0.7
FedDF	44.7 ± 1.1	82.1 ± 1.3	**86.4 ± 0.5**	72.8 ± 0.1	66.6	37.7 ± 0.7

The numbers. FedECS-LT reaches 58.4 ± 1.6 on CIFAR-10-LT (seeds 3 and 4) and 34.1 ± 0.2 on CIFAR-100-LT (one seed); its heads as trained reach 61.3 ± 1.8 on CIFAR-10-LT. Paired over the seeds both have, three methods are far above it on CIFAR-10-LT, with uncorrected intervals that exclude zero: FedYoYo by -19.8 points [-25.8, -13.7], FedLoGe by -9.9 [-11.8, -8.0] and CCVR by -9.6 [-13.3, -5.9] (negative numbers: FedECS-LT is behind). FedAvg, MOON and FedETF have higher means, 61.0 ± 1.8 and 59.9 ± 1.9, but the paired differences, -2.3 [-38.1, +33.5] and -0.5 [-11.7, +10.7] and -9.0 [-25.7, +7.7], are unresolved on two seeds. FedLC, CReFF, FedProx, RUCR and Fed-GraB have lower means (58.3 ± 1.9, 56.8 ± 2.3, 54.4 ± 1.6, 54.0 ± 1.6 and 49.4 ± 2.4). After Holm's correction no method ahead of FedECS-LT is significantly ahead, and of those behind it only RUCR is significantly behind ($p = 0.008$). On CIFAR-100-LT FedYoYo, FedLoGe and CCVR have higher means. The readout changes the heads by -3.0 points on CIFAR-10-LT and -0.3 on CIFAR-100-LT. The runs of FedECS-LT that are missing failed where the baselines finished, so they are not missing at random. The protocol's imbalance ratios 50 and 10 had not returned.

Possible reasons. The paper did not test why FedECS-LT is behind here, and these are explanations, not findings. With one shared model, FedAvg itself carries every client's knowledge into every client's model, which is the job the generator does when models differ. FedECS-LT also trains its head on frozen features of unaugmented images, while the baselines train the whole network end to end on augmented images (Chapter 6; Fig. 9 shows the round course). For the readout: with one shared model the head is averaged over the 8 clients of every round, so its last layer is not fitted to one client's prior, the failure the readout repairs; and a linear discriminant on embeddings that are not Gaussian can be worse than a trained

Table 12: Balanced accuracy (%) with one ResNet-8 shared by all clients (FedLTLib protocol), imbalance ratio 100; the paper's shared-model table. Each row averages the seeds that completed: on CIFAR-10-LT seeds 3 and 4 for FedECS-LT, CCVR, Fed-GraB, FedLC, FedYoYo and RUCR, seeds 3–5 for the others; on CIFAR-100-LT seeds 3 and 4, but seed 4 only for FedECS-LT and FedLoGe, whose values have no ±. Look at which rows are clearly above the first one, and which only slightly.

Method	CIFAR-10	CIFAR-100
FedECS-LT	58.4 ± 1.6	34.1 ± 0.2
FedECS-LT (heads only)	61.3 ± 1.8	34.4 ± 0.5
FedLC	58.3 ± 1.9	32.8 ± 0.1
FedAvg	61.0 ± 1.8	33.2 ± 0.3
FedProx	54.4 ± 1.6	31.2 ± 0.4
MOON	59.9 ± 1.9	33.4 ± 0.2
CCVR	68.0 ± 1.2	35.8 ± 0.1
CReFF	56.8 ± 2.3	28.1 ± 0.0
FedETF	65.3 ± 4.3	32.8 ± 0.2
Fed-GraB	49.4 ± 2.4	27.8 ± 0.1
FedLoGe	66.7 ± 2.9	39.4
FedYoYo	**78.1 ± 0.9**	**42.6 ± 0.5**
RUCR	54.0 ± 1.6	32.9 ± 0.2

last layer.

The published numbers. The baselines run in their authors' library on the paper's splits and report the model after the last round. Against FedYoYo's own evaluation in the same protocol, most of them are within about three points of the published values; that evaluation trains 300 rounds, the paper's 200. Three (CReFF, Fed-GraB, FedLC) are further below; they run with the library's common settings, which differ from those of their own papers, and were not tuned.

What it shows. FedECS-LT is a method for clients with different models. When the clients can share one model, the long-tail methods FedYoYo, FedLoGe and CCVR have far higher means, and plain FedAvg is not shown to be worse.

7.8 Representations

The question. This measurement asks whether the bodies of FedECS-LT separate the classes better than those of GeFL-F, independently of any last layer.

The measurement. The leave-one-out 10-nearest-neighbour accuracy of the test embeddings classifies each test image by the majority class of its ten nearest other test embeddings. It uses no last layer at all. It is 40.9% for FedECS-LT, 37.7% for GeFL-F and 38.9% for FedDF on CIFAR-10-LT, averaged over the ten architectures and three seeds. FedECS-LT is higher in 29 of the 30 architecture–seed pairs against GeFL-F and in 24 against FedDF. Figure 10 shows a t-SNE map of the embeddings of one architecture. t-SNE places high-dimensional points on a plane so that points that are near each other stay near; it preserves neighbourhoods, not distances.

What it shows and does not. The bodies of FedECS-LT separate the classes a little better, consistently across architectures and seeds. The difference is a few points, which agrees

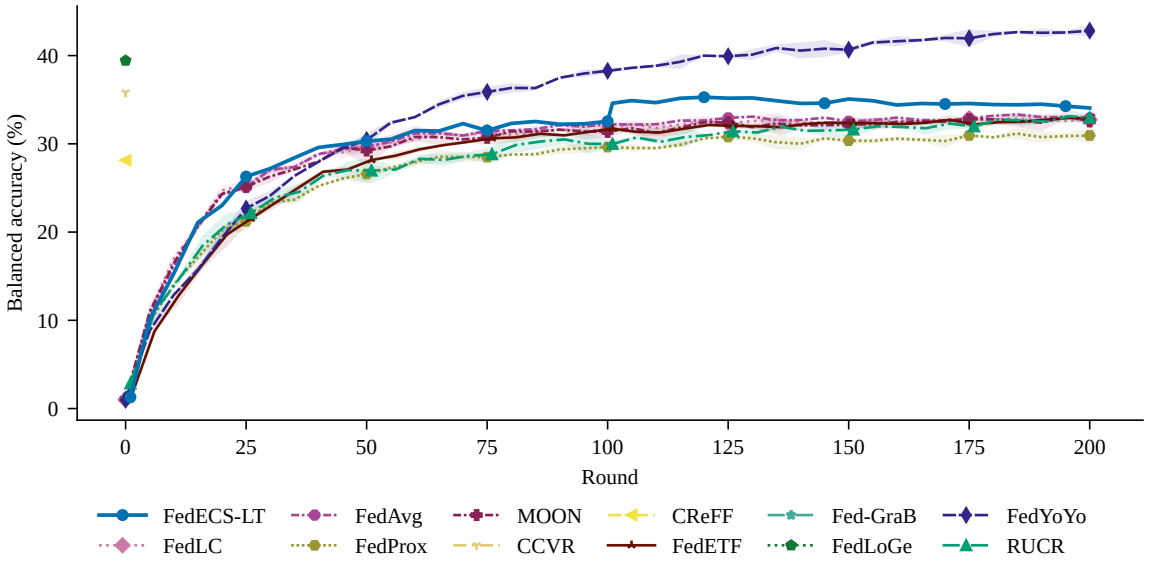


Figure 9: Balanced accuracy of the shared model over the rounds, CIFAR-100-LT with one shared model, seeds 3 and 4; from the paper's appendix. FedECS-LT's head stage is drawn after its extractor's rounds (its generator stage is not shown). Look at where each curve ends, and at how FedECS-LT's head stage starts from its extractor's level.

with the small same-readout margin of Section 7.4. A t-SNE map is an illustration; it cannot carry a quantitative claim.

7.9 Calibration, the weakest architecture and cost

Calibration. The expected calibration error of FedECS-LT is 21.2 ± 0.5 on CIFAR-10-LT, against 48.0 ± 2.2 for GeFL-F and 35.9 ± 1.9 for FedDF; it ranks 3 of nineteen methods there. On CIFAR-100-LT it ranks 5, with 43.8 ± 0.4 against 42.4 ± 0.7 for GeFL-F and 31.8 ± 1.2 for FedDF. So calibration is not an advantage on CIFAR-100-LT.

The weakest architecture. Balanced accuracy averages ten models. The weakest architecture of FedECS-LT reaches 48.5 ± 1.5 on CIFAR-10-LT and 14.9 ± 1.9 on CIFAR-100-LT, so the mean does not hide a failed model.

Cost. Table 13 gives the measured cost. FedECS-LT takes 1.13 times the wall-clock time of GeFL-F and 1.30 times its communication. Most of the extra time is the longer synthetic phase ($T_s = 10$), and most of the extra communication is the generator, which is larger than GeFL-F's because of its projection of the class means. Against Balanced Softmax, which trains its heads locally, FedECS-LT communicates 185 times as much and takes 15 times as long, for +1.4 points when both have the readout; Chapter 9 returns to this.

7.10 The ablations

Two groups of runs ask which changes carry the effect: variants of GeFL-F and FedDF that add one change at a time, and FedECS-LT with one component removed. Both use the splits and seeds of the main comparison, so every difference is paired.

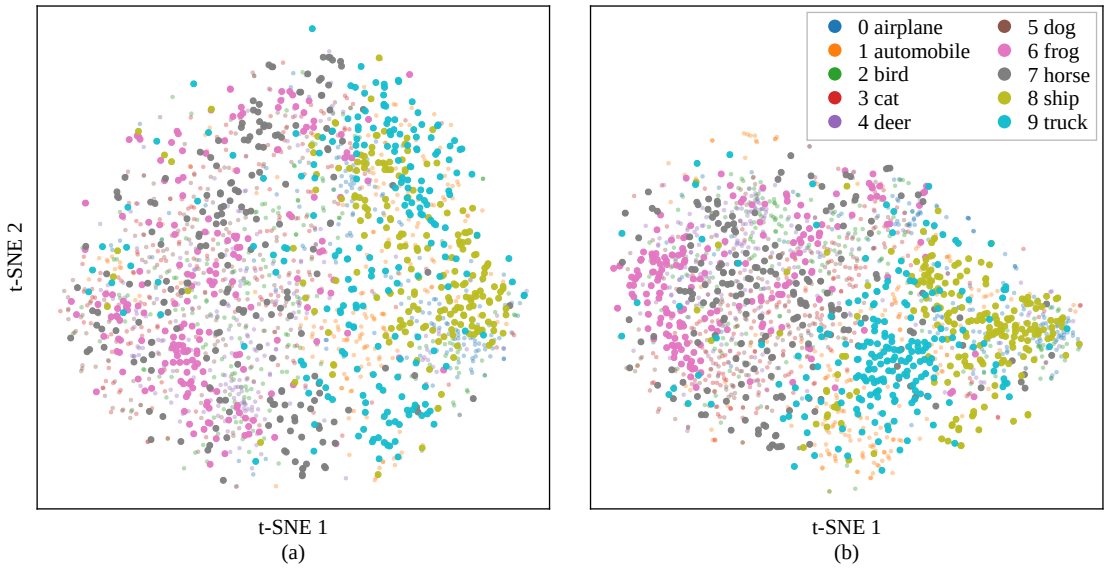


Figure 10: t-SNE of the test embeddings of one architecture on the same 2,000 CIFAR-10-LT test images, (a) GeFL-F and (b) FedECS-LT; tail classes drawn larger. Look only at which points group together: in a t-SNE map the sizes of clusters and the distances between them carry no meaning.

The decay diagnosis. GeFL-F with decoupled weight decay (AdamW) and nothing else changed is the direct test of Section 4.1. On CIFAR-10-LT it raises GeFL-F by +1.4 points ($p = 0.043$, uncorrected, at the noise floor of 1.4), its tail recall by +2.6 ($p = 0.038$), and its accuracy with the readout by +1.1 ($p = 0.12$). Its three CIFAR-100-LT runs ran out of host memory. So the shrinkage of the class rows has a measured cost, but a small one: decoupling the decay recovers little of GeFL-F's +18.9-point gap to FedECS-LT. AdamW changes the decay of every parameter, not only the rows, so even this small gain is consistent with the diagnosis rather than a proof of it.

The longer synthetic phase. GeFL-F and FedDF with ten synthetic epochs per round, as FedECS-LT, change by -1.6 and -2.5 points on CIFAR-10-LT ($p = 0.07$ and 0.012): more epochs on label-free features make them worse, which is consistent with the label-free lemma of Section 4.3. FedECS-LT's heads as trained stay +10.7 and +7.7 points ahead of them (CIFAR-100-LT: +6.7 and +4.6). The lead of the heads is therefore not the extra computation.

Logit adjustment. GeFL-F with decoupled decay and logit adjustment recovers +6.2 points on CIFAR-10-LT, and FedECS-LT's heads add +2.9 points on top, before the readout. Replacing GeFL-F's generator by class Gaussians from the exact class statistics, with logit adjustment, raises it by +10.3 points as trained and by +2.5 with the readout: features that carry their label, even from a simple sampler, teach the heads far more than GeFL-F's trained generator does. A reviewer reading this row will ask why FedECS-LT keeps a trained generator; the separate note on the Gaussian sampler (`docs/study/gaussian_sampler.pdf`) has the numbers for that discussion.

The components of FedECS-LT. Removing one component at a time and comparing with the full method, with the readout, on the same seeds: the largest loss on both benchmarks comes from "w/o consensus soft labels", +3.9 points on CIFAR-10-LT (Holm-corrected $p = 0.029$) and +2.0 on CIFAR-100-LT ($p = 0.016$). It is the only change that is both above the noise floor and significant after Holm's correction over the six changes. The other components show

Table 13: Cost on CIFAR-10-LT, from the paper's cost table: communication per client over the whole training, wall-clock time of a run (on a shared T4 GPU, so indicative only), forward MFLOPs per image and training GFLOPs per round. Compare the first row with Balanced Softmax.

Method	Comm./client (MB)	Time (s)	MFLOPs/img	Train. GFLOPs/round
FedECS-LT	11,278 ± 113	7,910 ± 2,253	2.45	1,424 ± 112
GeFL-F	8,659	7,025 ± 446	2.45	579 ± 42
Balanced Softmax	60.8	542 ± 99	2.45	**485 ± 34**
FedLC	60.8	501 ± 118	2.45	**485 ± 34**
FedRS	60.8	**417 ± 131**	2.45	**485 ± 34**
FedDF	8,659	5,050 ± 2,736	2.45	579 ± 42
Local	-	536 ± 98	-	-
FedProto	18.8	4,025 ± 109	2.45	485 ± 34
FedTGP	18.8	4,121 ± 218	2.45	485 ± 34
FedGen	128	4,443 ± 1,033	2.45	485 ± 34
FedGH	18.8	3,149 ± 103	2.45	485 ± 34
LG-FedAvg	18.8	2,890 ± 212	2.45	485 ± 34
FedMRL	**17.1**	4,545 ± 804	3.84	871 ± 34
FedAvg	43.5	762 ± 32	**1.73 ± 2.7e-16**	**485 ± 34**
FedProx	43.5	913 ± 47	**1.73 ± 2.7e-16**	**485 ± 34**
FedALA	43.5	528 ± 131	**1.73 ± 2.7e-16**	**485 ± 34**
AvgKD	172	669 ± 138	**1.73 ± 2.7e-16**	**485 ± 34**
CCVR	51.5	540 ± 41	**1.73 ± 2.7e-16**	**485 ± 34**
FedETF	43.6	536 ± 51	**1.73 ± 2.7e-16**	**485 ± 34**
Centralised (pooled data)	60.8	3,844 ± 226	2.45	4,789

no resolved effect beyond the readout:

- the full method minus its variant without the moment correction is -1.1 points on CIFAR-10-LT ($p = 0.39$): no benefit;
- class rows with CCWA instead of the mean anchor cost +0.2 points ($p = 0.43$), and with flat averaging +0.9 ($p = 0.43$);
- one synthetic epoch instead of ten changes it by -0.2, below the floor;
- without logit adjustment the heads as trained lose +9.0 points, but the change with the readout is +1.3, from one seed.

On CIFAR-100-LT four of the six changes have one seed only, because their runs ran out of host memory. The answer to RQ5 is therefore: of everything FedECS-LT adds before the readout, the consensus soft labels are the one part with a measured effect beyond it.

7.11 The experiments still pending

Several clients per architecture. The paper's 50-client setting has five clients per architecture, so heads of one architecture are averaged in Stage III. The question is whether the readout's dominance is an artefact of one client per architecture. With averaging, Balanced Softmax's heads would no longer be purely local, and their last layers would no longer fit one client's prior, so the readout should matter less. The paper is supported if FedECS-LT stays ahead of every method with the readout; it is weakened if the margins fall to zero. The other methods' 50-client runs have returned, but FedECS-LT, GeFL-F, FedDF and Balanced

Softmax ran out of host memory on both benchmarks, so the paper shows no 50-client table yet.

Other settings. Sweeps over the label skew ($\alpha = 0.1$ and 1.0), the number of clients (50 and 100) and the imbalance ratio (50 and 10) on CIFAR-10-LT test whether the result depends on the main setting's values. Their runs are pending, and the paper's text for them is not yet written. GTSRB, CIFAR-100-LT with one shared model on seed 5, and the shared-model ratios 50 and 10 are also pending.

What, taken together, does this evidence support?

8 What the evidence supports, and its limits

What is established. In generator-based learning with different client models and a long tail, the runs show three properties of GeFL-F: its generator's rare class rows are shorter, its generated features carry little class information, and its last layers lose most of what an exact readout recovers (Chapter 4). The runs show that FedECS-LT, ending with that readout, has a higher mean than every published method of the setting on all five long-tailed benchmarks and all six naturally imbalanced datasets, by margins that are large and, on the CIFAR benchmarks, significant, and on new client splits as on the development splits; on CIFAR-10-LT the gain is mostly in the recall of the rare classes (Sections 7.1 and 7.6). They also show that most of this margin is the readout's: added to the other methods of the GeFL-F pipeline, it leaves FedECS-LT a lead of +1.4 and +1.5 points on the CIFAR benchmarks and at most +0.9 on the natural datasets, which three seeds resolve only on MNIST (Section 7.4). Of the components before the readout, only the consensus soft labels have a resolved effect beyond it; the moment correction shows none, and decoupling the generator's decay alone recovers little of GeFL-F's loss (Section 7.10). The scope of all of this is one client per architecture, a small frozen extractor shared by all clients, a label shift between clients, and three seeds.

The limits of the study. The paper's limitations section lists what the study does not cover. Each item limits what may be claimed.

- **A small, frozen, shared extractor.** The architectures differ only in their heads. The results say nothing about pre-trained or larger extractors, or about clients whose whole networks differ. A stronger extractor would raise every method, and whether it would change the ranking is not known.
- **No method built for this exact problem exists.** The comparison is with long-tail losses applied per client, with FedDF, and with model-heterogeneous methods designed for label skew without a long tail. A margin over methods built for another problem is weaker evidence than a margin over a direct competitor would be.
- **Label shift only.** The splits differ between clients only in their class proportions (Chapter 3). The key fact behind the method, that every client's class-c samples point at the same target, fails under feature shift (the same class looks different on different clients) or concept shift. Those cases are not tested, and the exactness argument does not cover them.
- **One client per architecture** in every reported result. The 50-client runs are pending (Section 7.11).

- **No differential privacy.** The method can be called privacy-preserving only in the sense of secure aggregation against an honest-but-curious server (Section 5.7).
- **Cost.** FedECS-LT costs more than GeFL-F and far more than per-client long-tail losses (Table 13).
- **Low absolute accuracy.** GeFL's own authors attribute GeFL-F's lower accuracy on CIFAR-10 to its small extractor and heads. In GeFL's balanced setting the paper's earlier implementation of GeFL-F reaches 56.8% on CIFAR-10, close to GeFL's published value of about 55.9%, and the Flower implementation used for every reported run was checked against that earlier one (the same splits, and the same client training steps in unit tests). So the low numbers are those of the setting, not of a faulty re-implementation, and the same design trained on all data pooled reaches only 57.5 ± 0.2 on CIFAR-10-LT (Section 7.1). The low numbers are not comparable with centralised long-tail results for ResNet-32 and larger networks.

The trade-offs. Four costs come with the method.

- **Each client's own accuracy.** Balanced accuracy and the readout's equal priors serve the federation's rare classes at the expense of each client's own frequent ones. On the clients' own class mixes FedECS-LT is below most other methods (Chapter 7).
- **Communication and time.** 185 times the communication and 15 times the time of Balanced Softmax on CIFAR-10-LT, for a same-readout margin of +1.4 points that is not resolved.
- **Every client runs every head** (Sections 5.4 and 5.5), forward only, which assumes every client can store and run the largest head. The motivation of model heterogeneity, that clients run different networks because their hardware differs, is therefore only partly kept: the clients still train different networks, but each must be able to evaluate all of them, and the architectures are not secret.
- **Released class means**, which reveal the most about singly held and small classes (Section 5.7).

What does not follow. It does not follow that exact class statistics in the generator are what makes FedECS-LT work: the ablations find no resolved effect for the anchor or the moment correction beyond the readout. It does not follow that the decay is the main cause of GeFL-F's loss: removing it alone recovers little. And it does not follow that the result holds with several clients per architecture.

Which questions will a reviewer ask, and what are the honest answers?

9 Defending the paper

Three internal reviews of the paper raised the objections below. Each is stated as a reviewer would put it, followed by the honest answer, the evidence, and the experiment that would settle it with its status.

1. "Isn't the whole gain just the readout?"

Answer. Mostly, yes, and the paper says so. With heads as trained for the others, FedECS-LT leads the strongest other method by +15.1 and +8.6 points. With the readout for every method of the GeFL-F pipeline it leads by +1.4 [-0.7, +3.6] and +1.5 [+0.6, +2.4], not significant after Holm's correction ($p = 0.37$ and 0.058), and by at most +0.9 on the natural datasets (Sections 7.4 and 7.6). Balanced Softmax, which has no generator, leaves FedECS-LT a lead of only +1.4 points on CIFAR-10-LT once it has the readout.

Why the readout is still part of the method. The readout follows from the diagnosis: Section 4.2 shows that no per-client correction of the loss can give a last layer information about absent classes, and the readout is the repair that does. The paper therefore defines FedECS-LT as ending with it, credits the family it belongs to (Fed3R, FedNCM, FedCOF), and reports every method of the pipeline with it added, so the reader can see exactly how much is the readout's. What the paper can now add is that one component before the readout does have a resolved effect beyond it.

Settled by. The component ablation (Section 7.10): removing the consensus soft labels costs +3.9 and +2.0 points with the readout (Holm-corrected $p = 0.029$ and 0.016), the only resolved component effect. The anchor and the moment correction show none. So the honest answer is: mostly the readout, plus the consensus soft labels.

2. "The name says exact class statistics, but half the components do not use them"

Answer. Correct, and the paper says which do (Section 5.6): the anchored generator (or CCWA), the moment correction and the readout. Logit adjustment, consensus soft labels and ten synthetic epochs do not. The name describes the first group, which includes the readout that carries most of the effect.

Settled by. No run; it is a matter of wording, and the abstract separates the two groups.

3. "Is the weight-decay diagnosis causal?"

Answer. Not shown. What is measured is that the rare classes' rows are several times shorter (Fig. 3), as the lemmas predict: class 0 of the running example, held by every client, has no non-holder to shrink it, while class 9 has two. Against a causal reading: GeFL-F's generated features are recognised at 12.9 ± 2.4 on CIFAR-10-LT, 9.4 ± 0.9 on the head classes and 16.8 ± 0.3 on the tail classes, and at chance on CIFAR-100-LT (1.1 ± 0.1). If the shrinkage were what loses the rare classes, the head classes, whose rows are long, would be recognised; they are not. The row lengths also do not fall monotonically with class size, and the step-count heuristic κ_c was not checked against the rows. The paper calls the shrinkage a measured property of the generator, not a demonstrated cause.

Settled by. GeFL-F with decoupled weight decay alone (AdamW), now run on CIFAR-10-LT: it raises GeFL-F's balanced accuracy by +1.4 points and its tail recall by +2.6 (uncorrected $p = 0.043$ and 0.038). The answer is therefore: the shrinkage has a small measured cost, a small part of GeFL-F's loss. The CIFAR-100-LT runs ran out of memory and need a re-run.

4. "Do the other diagnoses matter: label-free generated features, and the moment correction?"

Answer. The label-free lemma is exact, but its size in the pipeline is not settled: FedDF, on GeFL-F's own generator, loses less logit spread than FedECS-LT (Section 4.3). The moment correction brings the generated spreads to 0.73 to 1.01 times the exact ones, but its fidelity changes on the tail classes and on average are within one standard deviation over the seeds (Section 5.3). Its value for accuracy is unmeasured.

Settled by. The component ablation: without the moment correction, the full method minus the variant is -1.1 points ($p = 0.39$), so the correction has no measured benefit; the consensus soft labels, which change the synthetic targets, are the one resolved component (question 1).

5. "Were the settings tuned on the test sets?"

Answer. The development used the same splits (seeds 3–5) and the same test sets as the reported runs, comparing about 36 configurations on CIFAR-10-LT and 17 on CIFAR-100-LT; the baselines were not tuned (Section 6.7). The CIFAR margins may therefore favour FedECS-LT. Two things limit the damage. The six naturally imbalanced datasets were never used in development, and there the pattern repeats: large margins with heads as trained for the others, small ones with the readout (Section 7.6). And every setting is the same on every dataset; nothing was set per dataset.

Settled by. The run on new splits, seeds 6–8: FedECS-LT reaches 51.9 ± 1.0 on CIFAR-10-LT there, against 52.6 ± 1.3 on seeds 3–5, with margins of +14.8 and +8.6 points as published and +1.0 and +1.3 with the readout for all, like those on the development splits (Section 7.1).

6. "Is the heads' advantage just more computation and ensemble distillation?"

Answer. It may be. FedECS-LT trains ten synthetic epochs per round against one for GeFL-F and FedDF, with consensus soft labels, which are a form of ensemble distillation; its training costs about two and a half times the GFLOPs per round of GeFL-F (Table 13). The margin of FedECS-LT's heads as trained over FedDF, +5.2 on CIFAR-10-LT, is not significant ($p = 0.099$) and has not been separated from this extra computation.

Settled by. GeFL-F and FedDF with ten synthetic epochs: they lose -1.6 and -2.5 points on CIFAR-10-LT, and FedECS-LT's heads stay +10.7 and +7.7 points ahead (Section 7.10). The extra computation is not the explanation; the consensus soft labels, a form of ensemble distillation, are part of it.

7. "With one client per architecture nothing is averaged; does the result hold with several?"

Answer. Unknown. In every reported result each architecture has one client, so Stage III averages nothing, and the per-client losses become purely local training. That is the case in which the readout should help most, because each last layer then fits one client's prior. With several clients per architecture, heads are averaged and the readout may matter less.

Settled by. The 50-client runs (five per architecture): the other methods returned, but FedECS-LT and the GeFL-F pipeline ran out of host memory and need a re-run (Section 7.11).

8. "If every client runs every head, why have different models at all?"

Answer. The clients still *train* different networks, but each must be able to evaluate all of them (Chapter 8). The paper states this as an assumption of its setting. It weakens the hardware motivation of model heterogeneity, and the answer should concede that.

Settled by. Not by a run. A variant in which a client skips the heads it cannot run, and the readout's sums omit it, is not implemented.

9. "Why is it worse than FedAvg with one shared model?"

Answer. First correct the premise: on CIFAR-10-LT, paired over the two seeds both have, FedECS-LT minus FedAvg is -2.3 [-38.1, +33.5] points, which is unresolved; the methods that are far ahead are FedYoYo, FedLoGe and CCVR (Section 7.7). The honest conclusion is that FedECS-LT is a method for clients with different models, and that in this protocol it is behind the strongest long-tail methods built for it, FedYoYo, FedLoGe and CCVR. Why, the paper did not test. Possible reasons are that with one shared model FedAvg already carries every client's knowledge into every model, that FedECS-LT trains its head on frozen features of unaugmented images while the baselines train end to end with augmentation, and, for the readout's -3.0-point effect, that the shared head's last layer is not fitted to one client's prior.

Settled by. Not planned. A run that trains FedECS-LT's extractor for all 200 rounds would test the extractor part of the second reason; such a run changes the heads by -0.8 points on seed 3, which suggests that the length of the extractor's training is not the explanation.

10. "Is a small gain worth 185 times the communication?"

Answer. Against Balanced Softmax with the readout, on CIFAR-10-LT, the measured gain is +1.4 points, not significant, for 185 times the communication and 15 times the time. On this evidence, a practitioner who only needs balanced accuracy in this setting would choose per-client Balanced Softmax plus the exact readout, which needs no generator. Of its components before the readout, only the consensus soft labels add resolved accuracy, so FedECS-LT's extra cost buys little beyond them, unless settings such as several clients per architecture show more. Against GeFL-F, the base it extends, the overhead is 1.30 times the communication and 1.13 times the time.

11. "What do the released statistics leak?"

Answer. The class means and spreads of the federation, which for a singly held or small class reveal much about one client's images (Section 5.7). The paper did not test an inversion of the means and has no differential privacy, so it claims nothing beyond secure aggregation against an honest-but-curious server.

Settled by. An inversion test on the smallest classes, or a differentially private release with its accuracy cost; neither is planned.

12. "Why are the absolute accuracies so low?"

Answer. Because the setting is GeFL-F's: a two-convolution extractor with 3 and 10 channels, frozen after Stage I, and small heads, under a long tail with ten clients. GeFL's authors attribute GeFL-F's lower accuracy to this extractor and these heads. In GeFL's own balanced setting the paper's earlier implementation of GeFL-F reaches 56.8% on CIFAR-10, against about 55.9% in GeFL's paper, and the Flower implementation of the reported runs was checked against that earlier one (Chapter 8). A stronger or pre-trained extractor was not studied.

Settled by. The reference trained on all data pooled gives the ceiling of this extractor and these heads: 57.5 ± 0.2 on CIFAR-10-LT and 22.4 ± 0.1 on CIFAR-100-LT (64.6 ± 0.2 and 25.4 ± 0.2 with the readout). Even without federation the accuracy is low, so the low numbers are those of the setting.

13. "How is this different from FedCOF, Fed3R or CCVR?"

Answer. The readout belongs to the same family as Fed3R (ridge regression), FedNCM (nearest class means) and FedCOF (an LDA-type classifier); these also note that their sums do not depend on the partition. The paper does not claim the readout or partition invariance as new. Its contributions are elsewhere: the diagnosis of which class-specific quantities of generator-based model-heterogeneous learning fail under a long tail, and where the readout is applied, per architecture, on bodies trained in the federation rather than pre-trained, with statistics from every client, including clients of other architectures. CCVR samples features from Gaussians with the pooled class moments to retrain a shared classifier; the moment correction instead maps a learned generator's samples onto those moments.

Settled by. The paper's variant of GeFL-F with class Gaussians from the exact statistics (Section 7.10) is the closest CCVR-style comparison it reports.

14. "Are the model-heterogeneous baselines weakened by the port?"

Answer. Possibly. FedProto, FedTGP, FedGen, FedGH, LG-FedAvg and FedMRL run on the frozen extractor with HtFLlib's settings, which were meant for end-to-end training, and the paper did not tune them or check the port against their published numbers. It discloses this as a threat to validity. The comparison that decides the paper's claims is with GeFL-F, FedDF and the per-client losses, which run in the same pipeline as FedECS-LT.

Settled by. A port check against the methods' published settings; not planned.

15. "Why only three seeds?"

Answer. Compute: the study has several hundred runs, and a run of a generator-based method takes about two hours on a shared Kaggle GPU (Table 13). Three seeds give little

power. A sign-flip permutation test cannot go below $p = 0.25$ with three pairs, so every significant result rests on the t-test's normality assumption. Margins of one to two points with the readout exceed the noise floor of 0.7 but fail Holm's correction (Section 6.6). The paper therefore reports intervals, applies Holm's correction, calls such differences unresolved rather than absent, and adds three new seeds for the main comparison, on new splits.